

# Installation Instructions

ITEM NO. : LA-702, LA-705, LA-708, LA-710

To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning. Installation must be performed by a qualified electrician.

## NOTE:

Remove all parts and hardware from the box along with any plastic protective packaging and carefully lay all the parts out on a clean, flat surface.


Shut off main power at circuit breaker before attempting to install luminaire.

Recommended Location for use: Dry indoor environment.

Use UL listed wire connectors for connections.

This LED light provides low maintenance service with no bulbs to change.

**25W Max LED**

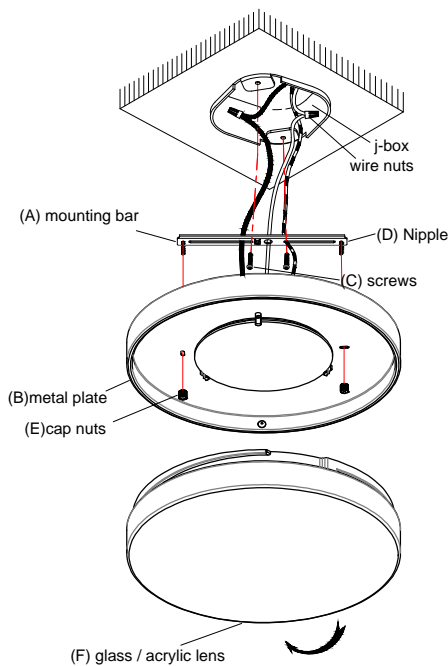

## Installation

Shut off main power at circuit breaker before attempting to install luminaire.

1. Twist counterclockwise to remove the glass / Acrylic lens (F) from the metal plate/mounting bar (A,B).
2. Install mounting bar (A) to junction box using mounting screws (C).
3. Pull the existing electrical wires out of the junction box and make proper connections with the wires on the fixture using wire nuts.
4. Install the metal plate to the mounting bar, secure it with cap nuts (E) screw on nipple (D).
5. Align the glass (acrylic) to the metal plate (B) and twist clockwise to fasten.
6. Turn on power and enjoy!

## Suggested Dimmers

This fixture is designed to operate with most standard dimmer.

Noted below is a listed of dimmers that have been tested with this fixture. This list of dimmers does not imply any guarantee or warranty of compatibility with a particular application.

Dimmers that are not listed do not imply non-compatibility. DVCL-153P / SCL-153P / AYCL-153P / CTCL-153P / DVCL-253P / GT-150 / GTJ-250M (ALL ARE LUTRON BRAND)

## Cleaning & Care:

To clean, wipe the fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.