
# ASSEMBLY AND INSTALLATION INSTRUCTIONS


H0275

## WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.

2. READ AND SAVE THIS INSTRUCTION.

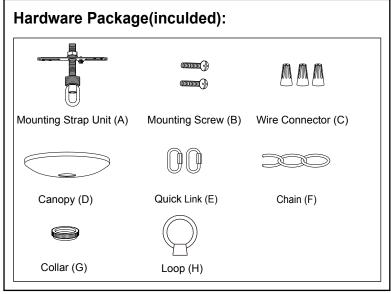



**Outlet Box** 


### **Installation Steps**

#### Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box using two mounting screws (B).

- 2. Install loop (H) on the threaded pipe with the fixture.
- 3. Choose the length of the chain (F) you needed, then weave the fixture wire and the fixture ground wire through the chain (F), collar (G) and canopy (D).
- 4. Connect the chain (F) to the loop (H) and the top loop on mounting strap unit (A) with two quick links (E).
- 5. Thread the fixture wire and fixture ground wire through the top loop, threaded pipe of the mounting strap unit (A).
- 6. Pull out the outlet wires and house ground wire from the outlet box. Make wire connections using the wire connectors (C):
  - ---The smooth wire (marked) from the fixture to the brown wire from the power source.
  - ---The ribbed wire (unmarked) from the fixture to the brown wire from the power source.
  - ---Attach the fixture ground wire to the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with a wire connector (C).

    Carefully put the wires back into the outlet box.
- 7. Attach the canopy (D) to the mounting strap unit (A) by inserting the top loop, then tighten the collar (G) to secure it.

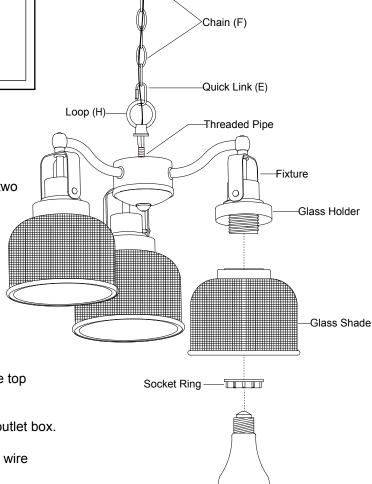





Max. 60W Type A Bulb (not included)

- 8. Attach the glass shades to the glass holders, then secure them with the socket rings.
- 9. Install 3 x 60W max. meduim base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.

#### Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

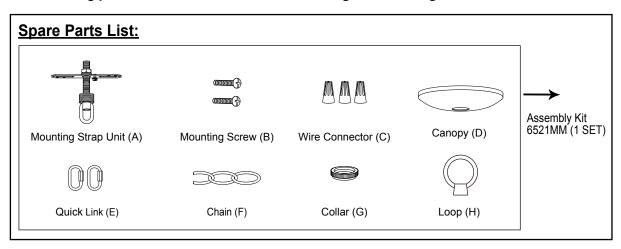

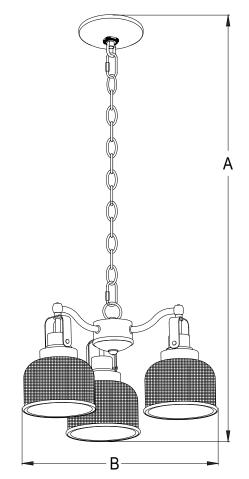

A: 8-1/2"~50-1/4"

B: 16-1/2"