

# Assembly Instruction Sheet #S-1218W12 For Style 1218W12

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (1) 120V LED 1" W/DIMMABLE (400K, 1

**Individual Assembly Time:** 16-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams before to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

## Package Contents



A Fixture Body x1

- 1 60Crystal Rods x5
- 2 80Crystal Rods x5
- 3 100Crystal Rods x5

## Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Cap nut	5ea
BB	Washer	5ea
CC	Outlet Box	5ea
DD	Mounting Screw	5ea
EE	Mounting bracket	5ea
AA		

**STEP 1 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket.**

A. Line up a set of holes on the Mounting bracket (EE) and Holes on the Backplate. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Washers and Hexed Hex Nuts onto the Mounting Screws (DD). Hand tighten unit snug.




Figure 1

**STEP 2 - Attach Mounting bracket to Outlet Box**

A. Pass the supply wires through the Mounting bracket (EE). Attach the mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw feeding you. Secure it with Outlet Box Screws.




Figure 2

**STEP 3 - Fit Backplate to Mounting bracket Assembly**

A. Fit the backplate to mounting screws (DD) and secure with Cap nut (AA). Note: The backplate should be snug against the ceiling and the Cap nut (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the backplate is secure, remove the Cap nut (AA) and proceed to Step 4




Figure 3

**STEP 4 - Wire Connections**

A. Use standard wire connectors to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

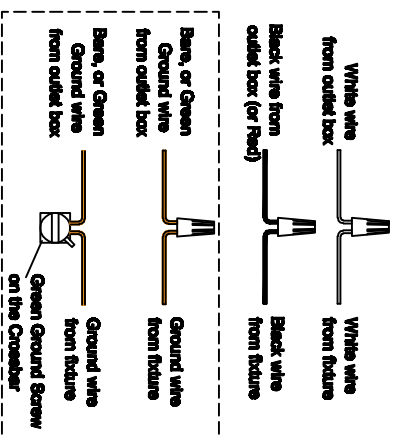


Figure 4

**STEP 5 - Install Backplate to Ceiling**

A. Carefully tuck all wires into the outlet box and position the backplate or the Fixture Body (A) over the outlet box. Align the holes in the backplate with the Mounting Screws (DD). Secure with Cap nut (AA) and hand tighten unit snug.




Figure 5

**STEP 6 - Install Crystal Rods.**

A. Put the Crystal Rods on the Fixture Body.

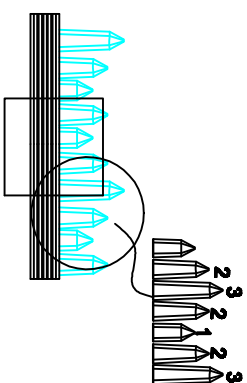


Figure 6

- 1 60Crystal Rods x5
- 2 80Crystal Rods x5
- 3 100Crystal Rods x5