

New Item



15384 AZT
15984 AZT6

MINI ACCENT

Recommended for spotlighting, cross-lighting and grazing.

SPECIFICATIONS

Housing Durable die-cast aluminum construction (BR and BBR are die cast brass, CO is die cast brass stem, extruded copper cowl). Heat-resistant flat glass lens is fully sealed.

Finish Textured Architectural Bronze, Beach, Brass, Bronzed Brass, Textured Black, Textured Midnight Spruce™

Wiring 35' of usable #18-2, SPT-1-W leads. Cable connector supplied with fixture. 12-Volt porcelain universal bi-pin socket.

Light Bulb 50-W. Max. (20-W. Canada) MR-16 (only supplied with 15384AZT30L, 15384AZT35L and 15384AZT50L). Can also use 35-W. MR-11. Note: 15384CO Copper only is 35-W. Max.

Mounting Accessories Included
8" In-ground stake

Optional Mounting Accessories
15656, 15657, 15658 or 15570 – Stems
15649 – Stem Coupler
15601 – Surface Mounting Flange
15607 – Tree/Surface Mounting Flange

Optional Lens Accessories
15641BL – Blue Filter
15642LIN – Linear Lens
15643FRO – Frosted Lens
15644BK – Louver

Bulk Pack
15384AZT24, 15384AZT24 and 15984AZT6 includes 8" ground stakes

Bulk Pack Pre-wired with Universal Connector
15984AZT6 with 25' of 16-gauge cable lead for use with Pro Series LV Junction



15384 BKT



15384 BE



15384 BBR



15384 BR




15384 MST



15384 CO

Copper only 35-W. Max.

*See pages 119-121 for more light bulb options and light bulb photometrics.

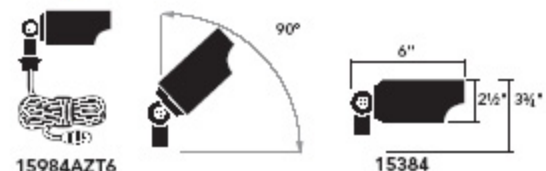

15984AZT6

15384