


## ASSEMBLY INSTRUCTIONS

ITEM NO.: 1-8070-8-51

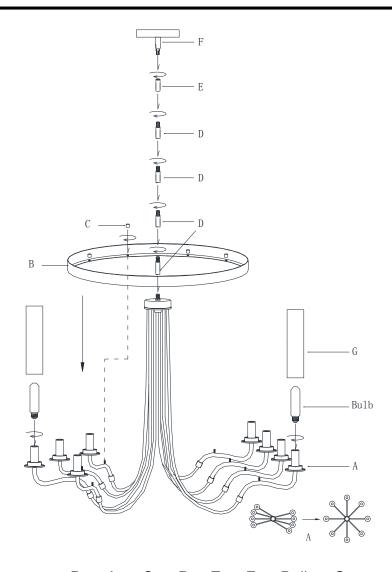

 $\mathsf{B} \to \mathsf{A} \to \mathsf{C} \to \mathsf{D} \to \mathsf{E} \to \mathsf{F} \to \mathsf{Bulb} \to \mathsf{G}$ 

- 1. Carefully unpack and identify all parts referring to illustration for parts identification.
- 2. Turn the power to the installation point OFF.
- 3. Unfold the arms of the fixture body (A) to locations.
- 4. Line up the holes on the ring (B) onto the fixture body (A), then thread the ball nuts (C) into protruding small nipple and hand tighten until snug to secure the ring (B).
- 5. Unravel the supply power and ground wires and pass them through the center holes of center tube (D), (E) and canopy assembly (F).
- 6. Thread the bottom of center tube (D) onto the protruding nipple at top of fixture body (A). Repeat the process for remaining center tube (E) as shown in the diagram, until snug.
- 7. Install the canopy assembly (F) onto the top of center tube (E).
- 8. Referring to the installation instruction with the product for the wiring and installation.
- 9. Install proper bulbs (not provided) to the sockets referring to the marking and/or labels on the fixture for maximum wattage.
- 10. Place the glass shade (G) setting inside the shade holder of fixture body (A).
- 11. Restore the power to the installation point ON.
- 12. Assembly is completely. Retain this sheet for future reference.