

WAC SMART FANS XF-12/XF-1

INSTALLATION INSTRUCTIONS

TABLE OF CONTENTS

1. Safety Rules
2. Package Contents
3. Installation Instructions

1. SAFETY RULES

For operation, maintenance, and troubleshooting information, visit modernforms.com/help.

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

-Read all instructions before installing.

-All wiring must be in accordance with the National Electrical Code "ANSI/NFPA 70" and local electrical codes. Electrical installation should be performed by a licensed electrician.

-The outlet box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 lbs (22.7 kg). Use only UL/cUL listed outlet boxes marked "FOR FAN SUPPORT OF 70 LBS OR LESS." Use only the screws and washers provided with the outlet box.

-The fan must be mounted with a minimum of 7 ft (2.1 m) clearance from the trailing edge of the fan blades to the floor and a minimum of 1.5 ft (0.5 m) from the edge of the fan blades to the surrounding walls.

-To avoid personal injury or damage to the fan and other items, please be cautious when working around or cleaning the fan. All set screws must be checked and re-tightened where necessary before installation.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by Modern Forms. Substitution of parts or accessories not designated for use with this product by Modern Forms could result in personal injury or property damage and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

WARNING: To reduce the risk of fire, electric shock, personal injury or damage to the fan or other items, mount the fan to a UL/cUL listed outlet box marked "FOR FAN SUPPORT" with the screws provided with the outlet box.


2. PACKAGE CONTENTS

A

DOWNROD COUPLERS

PARTS

- | | |
|-----------------------------|--------------------|
| A) 33.8mm Threaded Pin | D) Allen wrench |
| B) 34.5mm Threaded Pin | E) Downrod coupler |
| C) Allen set screws (4 pcs) | |

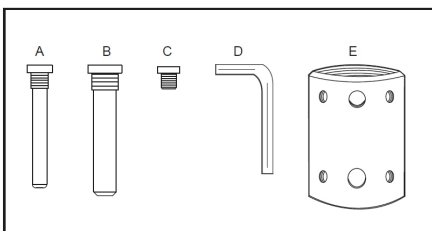

B

DOWNRODS

12", 18", 24", 36", 48", 60", 72"*



*Carbon Fiber downrods available in 12", 18", 24" and 36"/ Koa downrods available in 12", 18", 24" and 48"

Modern Forms retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

www.modernforms.com