

54" Patio **AirPro**

Ceiling Fan


-20


Type

P2533

_	:			:	_	ı	
г	ı	ľ	1	ı	5	ľ	1

		-	Dimensions (Inches)		
Catalog No	Antique Bronze		<u>A</u>	<u>B</u>	
P2533	-20		54	18-3/4	
Blades					
Side 1 & 2	Toasted Oak				

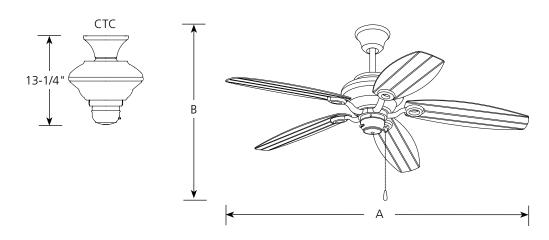



Fan mounted as close-to-ceiling

Specifications:

General

• 30 year limited warranty **Blades**

Five blades

- 12 degree pitch
- Sure Connect blade attachment system
 - Screws preinstalled in blades for attachment to motor arms
 - Special guides align blades to motor arms
 - Preinstalled rubber isolation pads minimize vibration noise
- ABS all-weather blade construction Motor
 - Triple capacitor speed control; manual reverse
 - 153mm dia x 18mm high
 - Pull chain is antique brass with walnut fob

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW: 4587 CFM cubic feet per minute

AIRFLOW EFFICIENCY: 69 cubic feet per minute per watt

ELECTRICITY USE:

Mounting

- Dual ceiling mounting on downrod, or close to ceiling
- A 3/4"x 6" downrod is included. Longer accessory downrods can be ordered separately
- Standard canopy designed for sloped ceilings up to 45 degrees (12:12 ceiling pitch) using downrod supplied or accessory downrods
- Oversized, textured die cast hanger ball reduces noise and wobble vibrations
- Canopy covers standard recessed 4" octagonal outlet box. Note: An outlet box assembly designed for fan installation is required (not included)
- · Mounting hardware is included Electrical
 - 80" lead wires included
 - Light fixture adaptable
 - Pre-wired

Labeling

• UL wet location listed

Progress Lighting 701 Millennium Blvd. Greenville, South Carolina 29607

Rev. 03/17 www.progresslighting.com

66 watts (excludes lights)