

**WARNING:**

This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended.

**CAUTION:** To prevent shock, only plug in lamp after lamp assembly is complete.


**WARNING:** This portable lamp has a polarized plug (one blade is wider than the other). As a safety feature, this plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to work around this safety feature.

Before assembly, remove all parts and part packages from box. If anything is missing, please contact the retailer from which the product was purchased.



ANY QUESTIONS CALL: 800-613-3261  
M-F 8:00AM-6:00PM ET

ITEM#: 113-1135

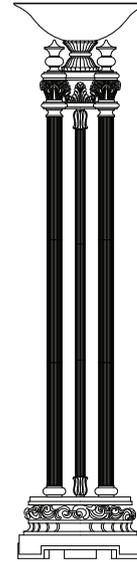

1. Carefully pull cord outward from base (D). Pull cord taut. Screw center tube (E) onto top of base (D).
2. Ensure cord is pulled taut. Screw center tube (F) onto top of center tube (E).
3. Ensure cord is pulled taut. Screw center tube (G) onto top of center tube (F).
4. Slip check ring (T) down onto top of center tube (G).
5. Thread end of threaded pipe with hexnut (H) onto top of center tube (G).
6. Thread one tube (K) onto bottom trim on top of base (D).
7. Thread two more tubes (K) onto top of first tube (K).
8. Fit bottom of threaded pipe with tube cover (L) onto top of last tube (K).
9. Repeat steps 6-8 for second bottom trim on base (D).
10. Hold center trim (M) so flower is on the bottom. Carefully slip center trim over ends of threaded pipes (H and L).
11. Slip washer (V) over end of threaded pipe with hexnut (H). Thread wing nut (N) onto end of threaded pipe with hexnut (H).
12. Set top trim (O) on top of center trim (M).
13. Thread one finial (P) onto end of each threaded pipe (L) protruding from top trim (O). DO NOT over tighten finials (P).
14. Pass hole in glass shade (R) over socket (A). Thread socket ring (S) onto socket (A). Tighten socket ring (S) to secure glass shade (R) in place. DO NOT over tighten socket ring (S).
15. Insert recommended bulb (not included) into socket (A). **WARNING:** Verify correct bulb wattage marked on socket of lamp. DO NOT exceed maximum bulb wattage.

