031822-058-& Roballation instructions for

BY KALCO LIGHTING

ALLEGRI

Customer Service :(702)361-4345,(800)525-2655,customer.service@kalco.com

- WARMING TO REDUCE THE RISK OF FIRE OR INJURY:
- 1.If you are unfamiliar with electricalwiring, call a qualified electrician to install this unit .More than one person may be necessary to install fixture ,make sure you have enough qualified help.
- 2.Turn off the power to the fixture's circuit at the service panel. Use a coltage detector to verify that the power is off.
- 3.DO NOT install bulb which exxeeds the maximum wattge specified on the socket label.

Eixtura Assambly	
Step 1. Place mount mounting and wiring steps before crystal installation step	
Step 2. Fix part #7 to part #8 by using screw	
Step 3. Put part #20 through part #1、#2、#3、#4、#5、 #6、#8、#9、#10、#11、#12、#13、#14、#15、 #16、#17、#18、#19、#21 then screw to part #1,#26.	5-Crystal column A
	6-Clear rubber washer B 7-Bending ring
	8-Metal lathe C 9-Clear rubber washer C
Step 4. Lnstall candelabra bulbs bulb, do not use bulbs that exceeds 40W	10-Crystal column B
	11-Clear rubber washer 12-Metai lathe D
	13-Clear rubber washer
	14-Crystal column C
	15-Clear rubber washer E
	16-Metal lathe E
	17-Clear rubber washer F
	18-Crystal column D 19-Clear rubber washer G 20-Thread Rod
	20 micual riod
	22-Metal lathe F
	23-Crystal tray
	24-Socket tube
	25-Cannula B
	26-Main body

ALLEGRI

031822058 Protellation instructions for:


BY KALCO LIGHTING


Customer Service :(702)361-4345,(800)525-2655,customer.service@kalco.com


Fixture Assembly


ATTENTION

- 1. Take all crystal or glass parts carefully from carton, then put them on a clean cloth.
- 2. Start hanging crystals from bottom center to top of fixture in an alphabetical order as shown in diagram

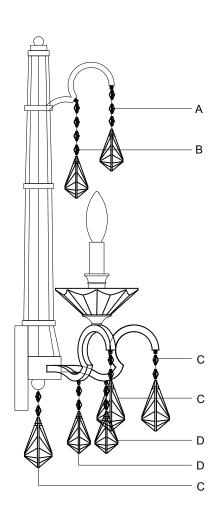



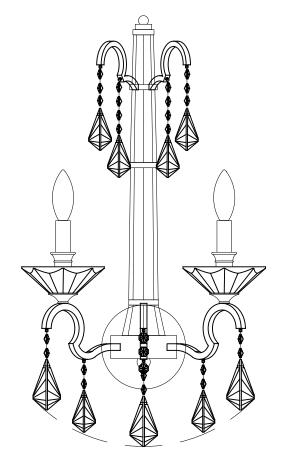

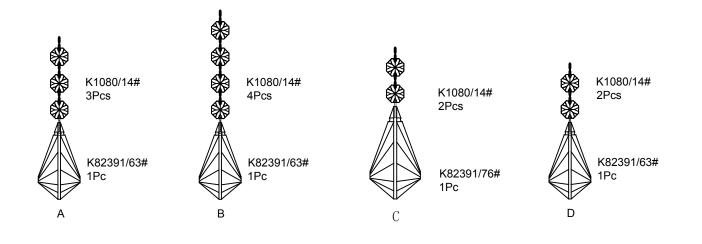

ALLEGRI

031822-058-& Roballation instructions for:

BY KALCO LIGHTING

Customer Service :(702)361-4345,(800)525-2655,customer.service@kalco.com

Fixture Assembly

- Step 5. Fasten 2 (state specification of screw) into mounting plate so that they extend away from wall when mounting plate is installed
- Step 6. Attach the mounting plate to outlet box with sorews
- Step 7. Refer to wiring diagram. Splice the ribbed side of fixture cord to the white supply wire from outlet box with wire connector. Splice the smooth side of the fixture cord to black supply wire from outlet box with wire connector
- Step 8. Carefully tuck in all wires Attach the backplate with the mounting screw on the crossbar.Secure fixture with shell hnobs.

