





## **ASSEMBLY INSTRUCTION MODEL #9224-EB**

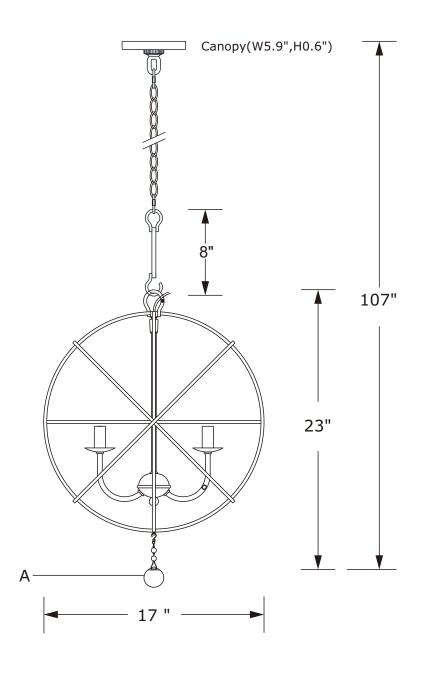



2XØ10mm+1XØ40mmBall



All electrical components must be installed by a licensed electrician in accordance with the National

Electric Code and the appropriate

local electrical codes.





You will need 5 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED


## How to Install

- 1.Do a complete inventory of all parts and components before you start installation.
- 2.Install bulbs (not included).
- 3.Install the mounting plate onto outlet box and secure it with the outlet box screws.
- 4.Take the end of the rod with a hook and attach it to the top of the fixture frame. Open a quick link and attach it to the other end of the rod (the end with a closed loop).
- 5. Thread the collar ring into the canopy.
- 6. Open the other quick link and attach it to the collar loop.
- 7. Connect fixture wires into the outlet box.
- 8. Raise the canopy onto the collar loop and secure it with the collar ring.
- 9. Attach the crystal ball "A" on the bottom of fixture.
- 10. After safely attaching fixture into outlet box, proceed to connecting the power.





## PART NUMBER MODEL # 9224-EB

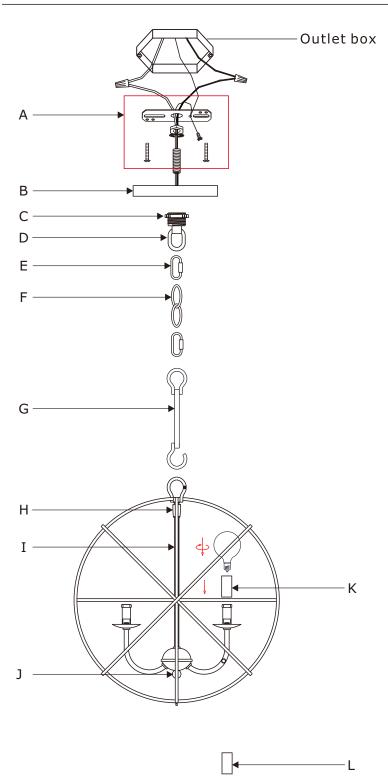

## Part Number

- A.(1) Mounting Hardware
- B.(1) Canopy(W5.9", H0.6") #XRE9224EBCAN5.9IN
- C.(1) Collar Ring
- D.(1) Collar Loop
- E.(2) Quick Link
- F.(1) Hanging Chain(72",4mm) #XRE9220EBCHA4MM
- G.(1) Rod(8",9.3mm) #XRE9224EBROD8IN
- H.(1) Swivel
- I.(1) Center Stem(10.83",9.3mm) #XRE9224EBSTEM10.83IN
- J.(1) Final #XRE9224EBFIN
- K.(5) Candle Sleeve(W0.87",H1.97") #XRE9224EBCDL1.97IN
- L.(5) White Plastic Candle Sleeve (W0.87",H1.97") #XRE9224PCDL1.97IN