

# MIRAGE Wall Sconce

120v : **3-516-xx**

277v : **37-516-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-25 Satin Copper



-14 Polished Chrome




-24 Satin Nickel



-40 Aged Brass

- LIGHT SOURCE** 1 x 11.9W LED, 3000K, CRI 90
- LUMINAIRE POWER** 15.0W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 764 lm (LM-79)
- INPUT VOLTAGE** 120V or 277V
- DRIVER OUTPUT** 350 mA, 12W
- DIMMING** 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Polished Chrome (-14), Satin Nickel (-24), Satin Copper (-25), Aged Brass (-40)
- MOUNTING** 4" Octagonal J-Box, 2"x3" J-Box
- STANDARDS** ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.
- NOTE** Backplate is required

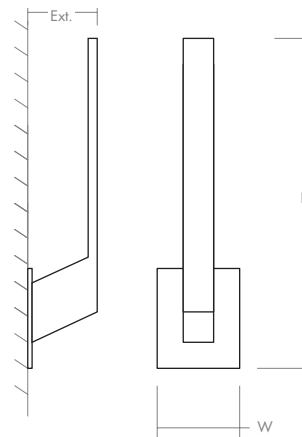

### DIMENSIONS

**W:** 4.75"

**H:** 19.09"

**Ext:** 4.00"

**M.C:** 16.18" From top of fixture

Order example for standard fixture:

**3-516-24** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-516-2724**

27: 2700K, 35: 3500K, 40: 4000K

