


CF3201

CRI 80 3000K 1750 Lumens LED two-ring ceiling light



Performance




- LED two-ring ceiling light is designed to provide 35,000 hours of life
- Energy-saving & Super bright, saving 75% energy compared with traditional troffer
- ETL compliant, for use in Damp locations

Construction

- steel base with white powder coating, rings with satin nickel finish
- Frosted diffuse acrylic lens

Installation

- Size: $\Phi 16(406.4\text{mm}) * H3.5"(88.9\text{mm})$

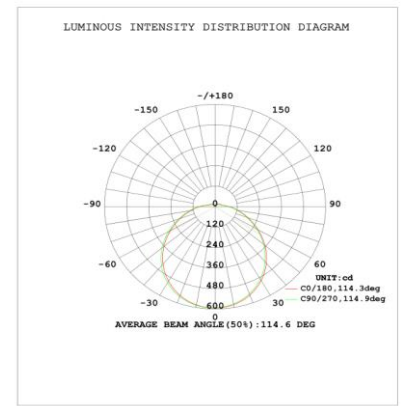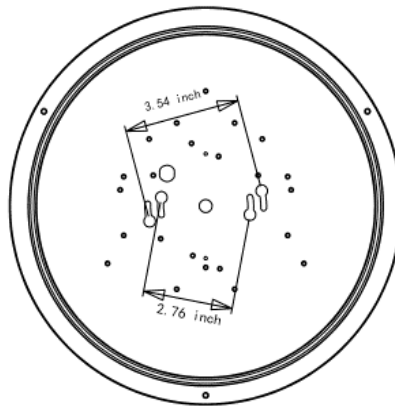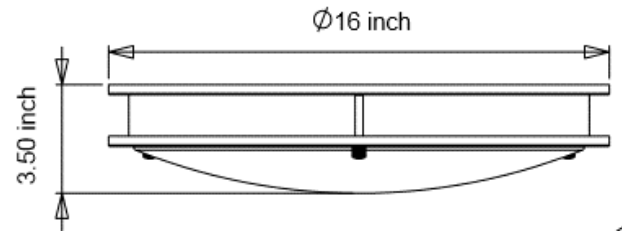

Specifications

Category	Ceiling Fixture	Individual Box Length (Inch)	16.54
Shape	Round	Individual Box Width (Inch)	3.94
Bulb Base Type	Integrated LED	Individual Box Height (Inch)	16.54
Bulb Base Finish	N/A	Individual Box Weight per Unit (LBS)	3.7
Color Temperature	3000K		
Beam Angle	120		
Finish	Brushed Nickel		
CRI	>80		
Average Life (Hours)	50000		
Estimated Yearly Energy Cost (11 ϕ /Kwh)	3.01	Lamp Type	LED
Life Based On 3Hrs/Day (Years)	45.66	Bulb Shape	N/A
Product Length (Inch)	N/A	Dry/Wet/Damp	Damp
Product Width (Inch)	16	Energy Star	NO
Product Height (Inch)	3.5	Power Factor	0.9
Product Extension (Inch)	N/A	Current	232MA
Product Weight Per Unit (Lbs)	2.8	Lumen/Watt	70
Dimmable	YES	Warranty (Year)	5
Watts	25	DLC (Yes/No)	NO
Watt Equivalent	80	Input Voltage	120V
Lumens	1750	Housing Material	Iron
Certification (UL/ETL/FCC)	ETL	Lens	Acrylic
		Led Type	Sanan