
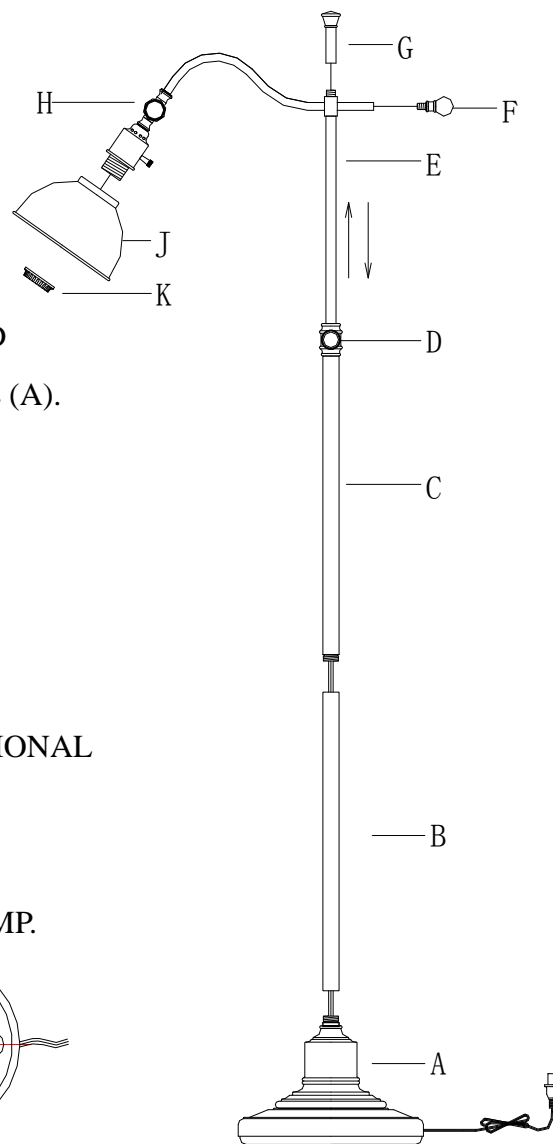


ASSEMBLY INSTRUCTIONS

ITEM NO: BO-2588FL

1. CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE AND LAY THEM UP AS PER THE SKETCH.
2. SCREW POLE(B), (C) INTO LAMP BASE (A) AND PULL THE WIRE OUT FROM BOTTOM OF BASE (A).
3. PUT METAL SHADE(J) ONTO THE SOCKET TIGHTEN IN WITH SOCKET RING(K).
4. LOOSEN THE TURN-KNOB(H), ADJUST THE SHADE(J), THEN LOCK IT TIGHT.
5. SCREW FINIAL(F) AND PART(G) ON THE LAMP.
6. LOOSEN THE TURN-KNOB(D) , ADJUST FLECTIONAL POLE(E) TO CHANGE HEIGHT.
7. INSERT THE POLARIZED PLUG INTO OUTLET, TURN ON THE SWITCH AND ENJOY YOUR LAMP.

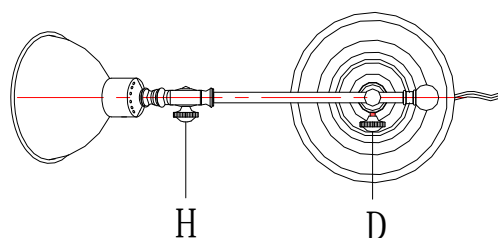

USE 60 WATTAGE (MAXIMUM) TYPE A BULB (BULB NOT INCLUDED)

IMPORTANT SAFETY INSTRUCTIONS:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.