

# ELIF Outdoor

120v : **3-736-xx**

277v : **37-736-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_





-16 Gray



-22 Oiled Bronze

|                                    |   |
|------------------------------------|---|
| <b>LIGHT SOURCE</b>                | 1 x 10.1W LED, 3000K, CRI 90  |
| <b>LUMINAIRE POWER</b>             | 13.0W at 120V   |
| <b>RATED LIFE</b>                  | 60000 hr RL   |
| <b>OPTIONAL COLOR TEMPERATURES</b> | 2700K, 3500K, 4000K   |
| <b>LUMEN OUTPUT</b>                | Delivered: 426 lm (LM-79)   |
| <b>INPUT VOLTAGE</b>               | 120V or 277V  |
| <b>DRIVER OUTPUT</b>               | 350 mA, 12W   |
| <b>DIMMING</b>                     | 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming   |
| <b>CONSTRUCTION</b>                | Cast Aluminium and Polycarbonate  |
| <b>DIFFUSER</b>                    | - Polished White Polycarbonate  |
| <b>FINISHES</b>                    | Gray (-16), Oiled Bronze (-22)  |
| <b>MOUNTING</b>                    | 4" Octagonal J-Box, 2"x3" J-Box*<br>* Must be mounted horizontally<br>(Installer must provide a bead of caulk between fixture housing and mounting surface) |
| <b>STANDARDS</b>                   | ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.   |

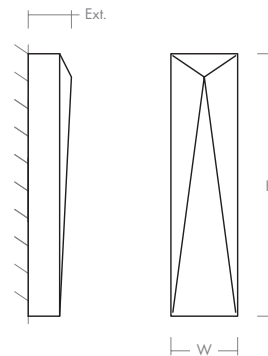

### DIMENSIONS

**W:** 4.25"

**H:** 16.50"

**Ext:** 2.75"

**M.C:** 8.55" From top of fixture

Order example for standard fixture:

**3-736-22** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-736-2722**

27: 2700K, 35: 3500K, 40: 4000K

