


WAND Vanity

3-56-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____

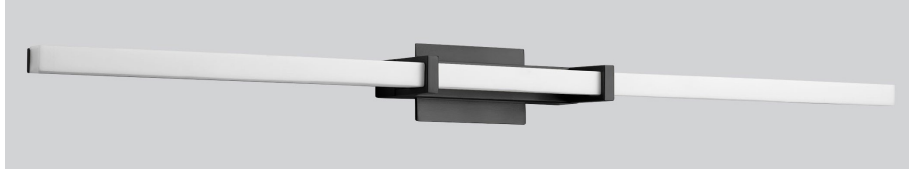

-15 Black




-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE 1x 37.0W LED, 3000K, CRI 90
LUMINAIRE POWER 43.2W Input Power at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 3000K Only
LUMEN OUTPUT Delivered: 3049 lm (LM-79)
INPUT VOLTAGE 120V & 277V AC, 50/60Hz
DRIVER OUTPUT* 44.1W max power @1050mA
DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 1% current output
CONSTRUCTION Cold Rolled Steel Housing
DIFFUSER - Matte White Acrylic
FINISHES Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING With Small Backplate - 2"x3" J-Box, 4" Square J-Box w/ single device mud ring
With Large Backplate - 2"x3" J-Box, 4" Octagonal J-Box
STANDARDS cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

* 600-1200mA programmable driver, 50.4W max power @1200mA

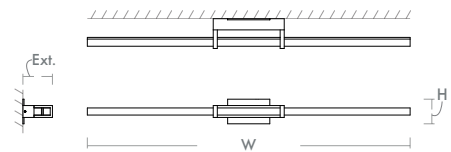

DIMENSIONS

W: 36.38"
H: 2.75" with Small Backplate
 4.75" with Large Backplate
Ext: 3.33"
M.C: 18.19" From side of fixture

Order example for standard fixture:
3-56-24 (x-xxx: LED Sequence # / -xx: Finish)

