




PRODUCT DESCRIPTION

Channels of Black are fused in an erratic fashion concealing a LED light source that emits a soft and even illumination to the surface below. Light intensity is adjustable down to 10% to allow for multiple room scene settings.

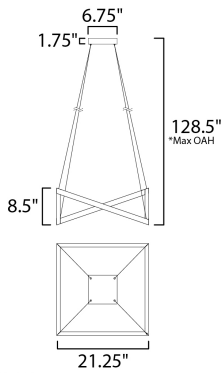

*max overall height

MEASUREMENTS

DIMENSION : 21.25" L x 21.25" W x 8.5" H
 MAX OAH : 128.5" OAH
 CANOPY : 6.75" W x 1.75" H x 6.75" L
 HANGING WEIGHT : 15.87 lb

LAMPING

INPUT VOLTAGE : 120V
 LUMENS : 2,500 Rated (1,600 Del.)
 BULB : 1 x 36W LED PCB Integrated , 36W Total
 BULB INCLUDED : (Integrated)
 DIMMABLE : Triac CL
 CRI : 80+ CRI
 COLOR_TEMP : 3000K

FINISHES OPTION

 Black

MATERIAL

Aluminum, Steel

RATINGS

cETLus
 Dry Location



ADDITIONAL

ADJUSTABLE
 SLOPE: 70
 RATED LIFE 50000 Hours
 OPERATING TEMPERATURE:
 -20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746
EASTERN DISTRIBUTION CENTER
 4200 SHIRLEY DR. | ATLANTA, GA 30336
 P. 626.956.4200 | F. 626.956.4225 | et2online.com