

# PENDANT FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

## CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

## GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## ASSEMBLY AND INSTALLATION

1. Put the fixture wire through the pipes (Adjust the length needed with different lengths of tubes (1x3", 1x6", 3x12"), and Canopy Assembly, secure pipe to canopy assembly and shade.
2. Thread two screws to the cross bar and secure with the hex nut.
3. Secure the cross bar with mounting screws to the outlet box.
4. Pull out the outlet wire and ground wire from the Outlet Box. Make wire connections:
  - Ribbed wire (w/o marking) from light to White Wire from power source.
  - Smooth wire (w/ marking) from light to Black Wire from power source.
  - Loop the Ground Wire to cross bar with a Green Screw.
5. Attach the Canopy Assembly against the Outlet box, secure with the ball nuts.
6. Install bulbs: (bulbs not included)  
(Please don't exceed the maximum capacity that recommended on the Sockets).
7. Thread the nipple to connector-2, attach the diffuser, plastic washer, metal washer to nipple, then screw with the hex nut.
8. Attach the bottom cover to the nipple, tighten with finial.

INSTALLATION IS NOW COMPLETED.

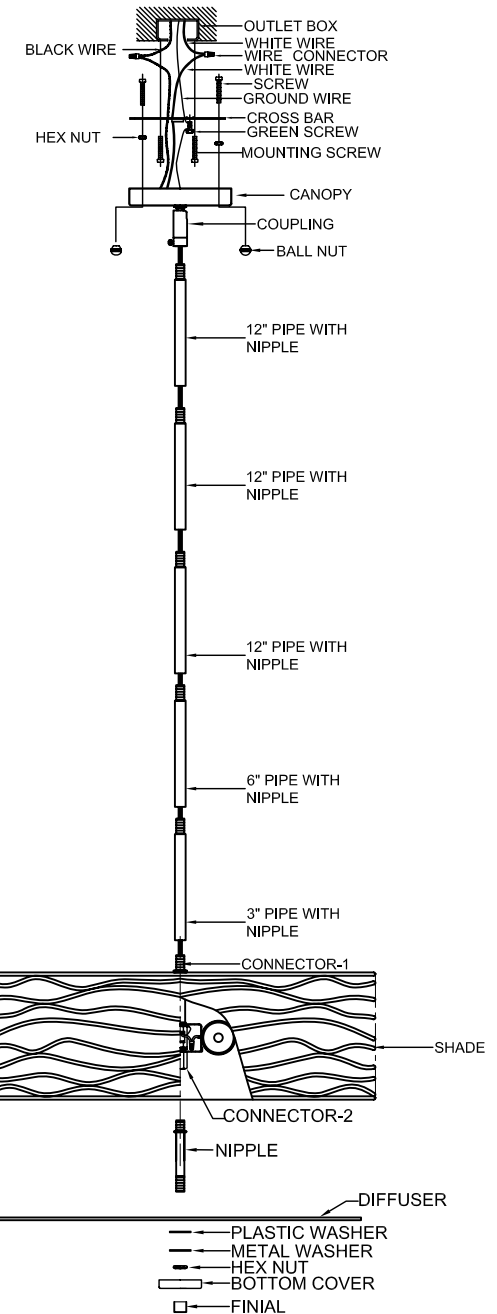

FOR ITEM 2009-14BRZ, 2009-18BRZ, 2009-24BRZ