

# PEEPERS Wall Sconce / Ceiling Mount

Universal Voltage: **32-601-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-40 Aged Brass



-20 Polished Nickel



-24 Satin Nickel

**LIGHT SOURCE** 1 x 18.2W LED, 3000K, CRI 90

**LUMINAIRE POWER** 21.2W at 120V

**RATED LIFE** 60000 hr RL

**OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K

**LUMEN OUTPUT** Delivered: 1110 lm (LM-79)

**INPUT VOLTAGE** Universal Voltage 120V-277V

**DRIVER OUTPUT** 600mA

**DIMMING** 0-10v - 50/60Hz 100% to 10% Dimming


**CONSTRUCTION** Plated Steel and Acrylic

**DIFFUSER** - Matte White Acrylic

**FINISHES** Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40)

**MOUNTING** 4" Octagonal J-Box, 4" Square J-Box, 2"x3" J-box

**STANDARDS** ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

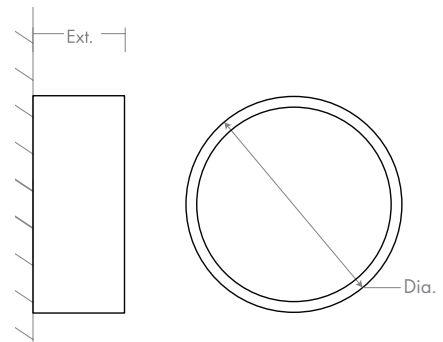

### DIMENSIONS

**Dia.:** 10.25"

**Ext:** 3.375"

**M.C:** 5.125" From top of fixture

Order example for standard fixture:

**32-601-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**32:** Universal Voltage

Order example for optional color temperatures: **32-601-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

