



# CM403P CONTEMPORARY ROUND

Ceiling Fixture with Acrylic Shade  
Line Voltage LED Fixture

Type	
Project	
Catalog No.	



## DESCRIPTION

The CM403P series is the next generation of residential and commercial flush mount, ceiling fixture incorporating JESCO's exclusive *Driverless AC LED* technology. Operating directly off of AC voltage, no secondary LED driver is required. The round acrylic lens is available in either 12" or 14" diameter. The 12" fixture incorporates a 15W LED module which emits 1090 lumens from the fixture providing a similar lumen output to a 75W incandescent lamp. The 13" fixture uses a 23W LED module emitting 1630 lumens from the fixture providing a similar light output to a 100W incandescent lamp. Both fixtures can be dimmed by most standard incandescent, electronic or magnetic low voltage, and CFL/LED dimmers. Operating at 277 VAC can be accomplished with an additional transformer.

## FEATURES

- Up to 1650 lumens emitted from fixture
- JESCO's exclusive *Driverless AC LED* technology eliminates the need for an in-line or secondary LED driver. Incorporated with our advanced heat sink design, the fixture provides superior thermal management for true 50,000 hours of operation with 70% lumen maintenance
- Patent pending inrush current / surge protection designed to prevent damage to both LED module and dimmer
- CRI of 80+, 90+
- Available in 2700K, 3000K and 4000K
- Dimmable 10-100% with most leading or trailing edge incandescent or low voltage dimmers
- Suitable for use in closet applications
- Eco Friendly – No mercury or hazardous material

## SPECIFICATIONS

Model	CM403P-S		CM403P-M	
Description	LED Ceiling Fixture			
Input Voltage	120 VAC			
Wattage	15W		23W	
CCT	3000K 4000K	2700K 3000K	3000K 4000K	2700K 3000K
CRI	80+	90+	80+	90+
Lumens	990Lm 1090Lm	705Lm 880Lm	1490Lm 1630Lm	1006Lm 1250Lm
Efficacy*	66.0Lm/W 72.7Lm/W	47.0Lm/W 58.7Lm/W	64.7Lm/W 70.9Lm/W	43.7Lm/W 54.3Lm/W
Power Factor	>0.90			
Dimming	10-100% Triac, ELV, MLV, CFL/LED			
Dimensions	11 7/8" Ø x 3 1/2"		14 1/2" Ø x 4"	
L70	50,000 hours			
Finish	White, Brush Nickel, Chrome			
Environment	Indoor - Dry			
Certifications				
Warranty	5 Years – see published warranty terms for detailed information			



- Thirty 15W or twenty 23W fixture maximum run on one 600W dimmer
- Fifteen 15W or ten 23W fixture maximum run on one 300W dimmer

## ORDERING INSTRUCTIONS

MODEL	SHAPE	SIZE	CCT	FINISH
CM	403P			
CM – Series	403P – Round Acrylic	S – 11-7/8" M – 14-1/2"	2790 – 2700K/90CRI 3090 – 3000K/90CRI	BN – Brushed Nickel

Example: **CM403P-M-4090-WH**



www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6<sup>th</sup> Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955

Rev 10  
5/24/2016

Specifications subject to change without notice.





# CM403P CONTEMPORARY ROUND

Ceiling Fixture with Acrylic Shade  
Line Voltage LED Fixture

Type	
Project	
Catalog No.	

## DIMENSIONS

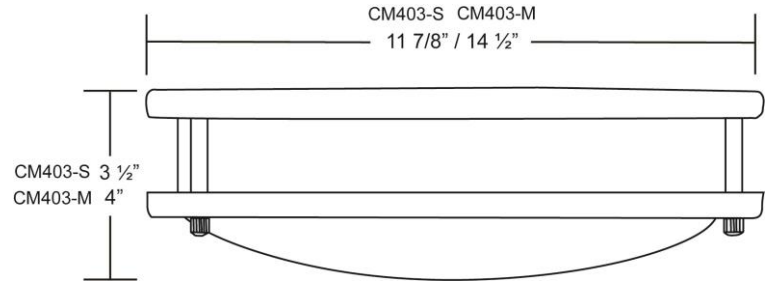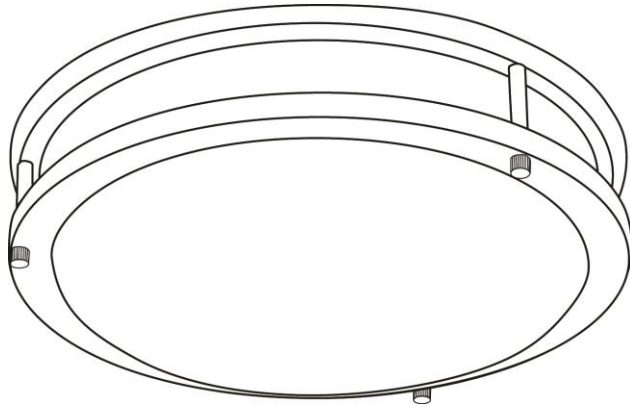

## COMPATIBLE DIMMERS

MANUFACTURER	STYLE	MODEL NUMBER	TYPE
Lutron	Diva	DVCL-153P	(CFL/LED)
	Diva	DVELV-303P	(Electronic Low Voltage)
	Diva	DVLV-600P	(Magnetic Low Voltage)
	Maestro	MACL-153M	(CFL/LED)
	Maestro	MFR2-6DN-120	(Spec Grade)
	Skylark	SELV-300P	(Electronic Low Voltage)
	Skylark	S-600	(Incandescent)
	Skylark Contour	CTCL-153P	(CFL/LED)
Leviton	Acenti	Ate06-1LW	(Electronic Low Voltage)
	Trimatron	705	(Incandescent)
Cooper	Devine	D106P	(Incandescent/Magnet/Low Voltage)
Pass & Seymour	Harmony		(Incandescent 600W)