

Hadley Chandelier

LC1165 | 1.0

GENERATION LIGHTING CHANDELIER


GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

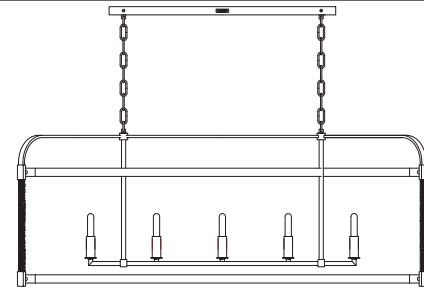


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

Assemble the Frame

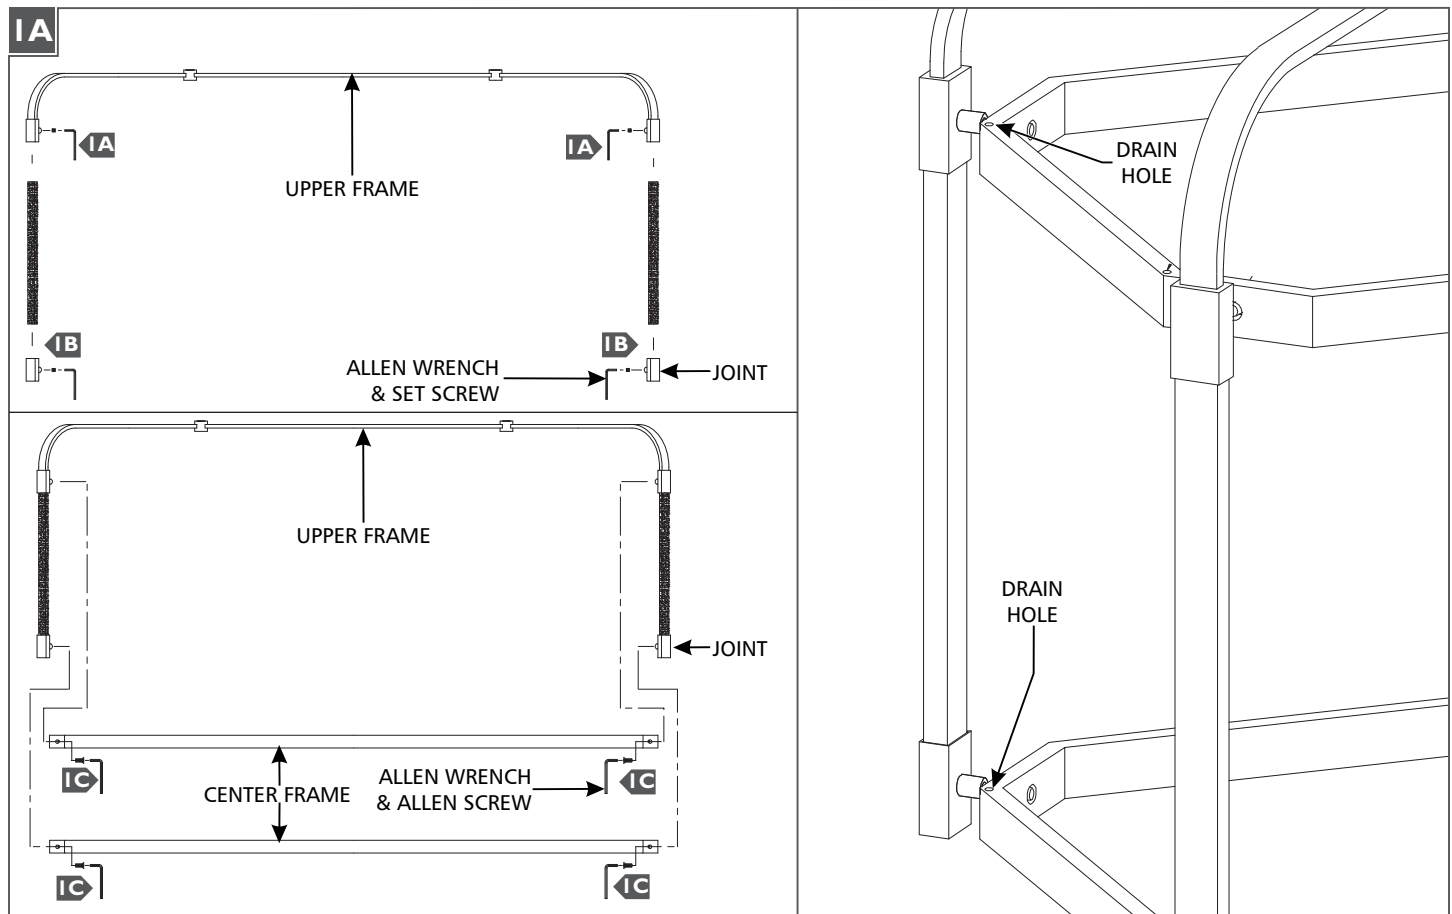


I Assemble the Frame:

- A) Insert the side frame (make sure the stitches on the leather face the center of the fixture) into the upper frame and secure them with the set screws using the small provided Allen wrench.
- B) Install the joints to the ends of the side frames and secure them together with the set screws using the provided small Allen wrench.
- C) Install the center frames (make sure the drain holes, if any, are facing up) onto side frame joints with fixture screws using the large provided Allen wrench. Adjust the frames if needed.

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

2A

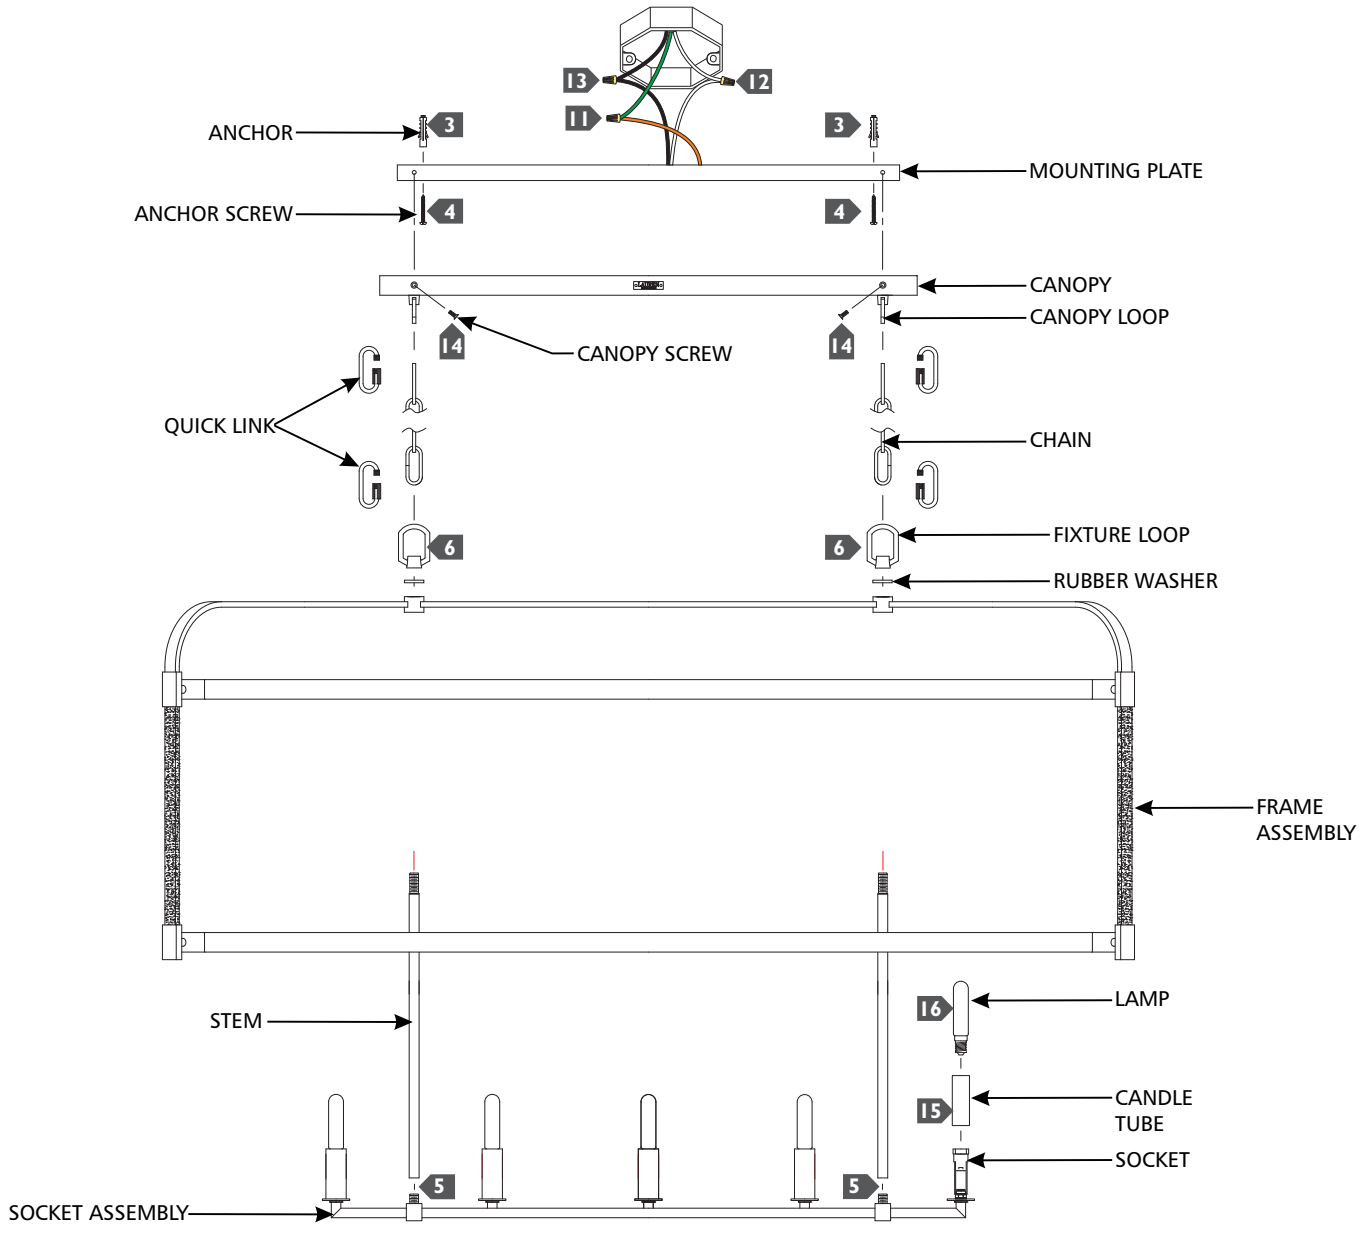

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 3** Drill appropriate sized holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 5** Feed the fixture wires the stem and screw the stems onto the socket assembly.
- 6** Feed the fixture wires through the frame assembly, rubber washers, and fixture loops, then secure the frame assembly to the stems by screwing the fixture loops onto the stems.
- 7** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 8** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 9** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 10** Weave the cord through the chain, canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 11** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 12** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the canopy screws.
- 15** Install the candle tubes by sliding them over the sockets.
- 16** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.