

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 4226 4227

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the tube (K) to the coupling of the fixture body(L) , attach the tube (J) and (I) onto the pipe nipple of the tube (K), by turning it clockwise until tight.
4. Attach the ring(Q),plate(P),canopy(G) onto the pipe nipple of the tube (I) , and lock them securely with the washer and hex nuts(F).
5. End of pipe nipple screw(C) into single bar (D), place lock washer (B) over end of nipple protruding through single bar and lock it securely with the hex nut (A). Take this single bar assembly to junction box with junction box screws (E), tighten screws securely with screwdriver. The side of the single bar marked "GND" must face to out.
6. While holding the fixture lamp towards the ceiling , connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Single bar with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
7. Raise the fixture body on to the Junction box, aligning screws on single bar with mounting hole in canopy and lock it securely with the finial (H). Attach the glass(M) to the socket holder and lock it securely with the check ring(N).
8. Install the light bulbs in accordance with the fixture's specifications.

NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.

Your installation is now complete Return power to the junction box and test the fixture.

Fig.1

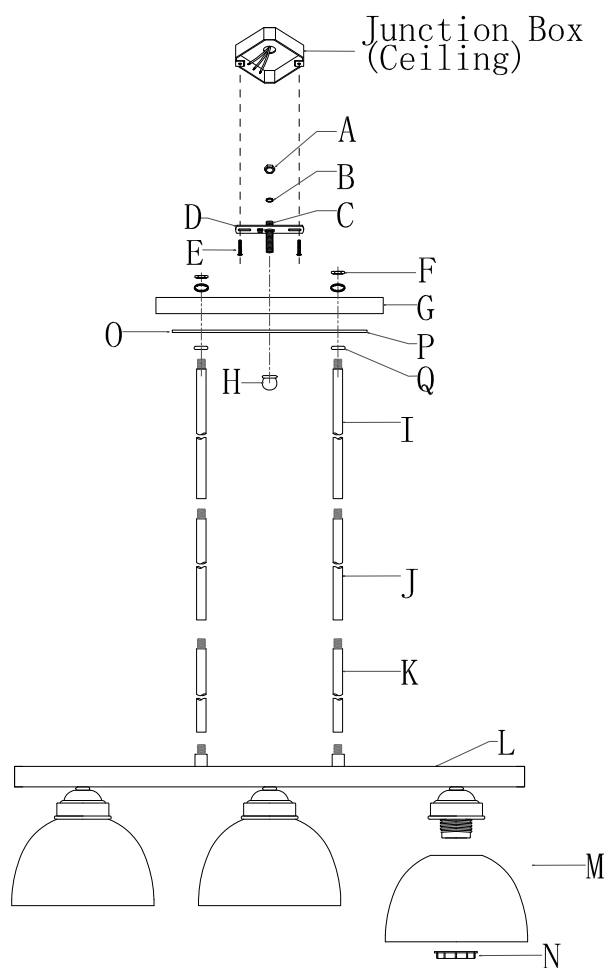


Fig.2

