

GUAPO Wall Sconce
3-401-xxxx

oxygen

FIXTURE TYPE _____
 PROJECT _____


LOCATION _____
 DATE _____




-40 Aged Brass



-24 Satin Nickel




-640 White/Aged Brass



-1541 Black/Weathered Oak

LIGHT SOURCE (2x) 3W LED Arrays, 3000K, CRI 90
LUMINAIRE POWER 7.3W Input Power
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 277 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 180mA, 7.6W max power
DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 10% current output
CONSTRUCTION Cold Rolled Steel Housing
DIFFUSER - Matte White Acrylic
FINISHES Satin Nickel (-24), Aged Brass (-40),
 White/Aged Brass (-640), Black/Weathered Oak (-1541)
MOUNTING 4" Octagonal J-Box*, 4" Square J-Box*,
 4" Square J-Box* with a single device mud ring
 *Deep J-Box (Required to house driver)
STANDARDS cUL Damp Listed, ADA Compliant, Conforms to
 UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

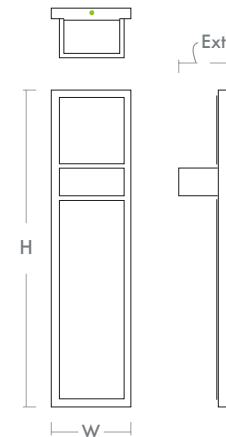

DIMENSIONS

W: 4.00"
H: 16.00"
Ext: 2.50"
M.C: 8.00" From top of fixture

Order example for standard fixture:

3-401-24 (x-xxx: LED Sequence # / -xx: Finish)

Order example for optional color temperatures: **3-401-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

