CF3202

12" 15W CRI 80 5000K 1050 Lumens LED Decorative Ceiling Fixture

A. Multi-faceted fixture interior engineered to maximize LED module performance.

B. LED module designed to deliver maximum light levels to work surface without fixture glare.

C. Opaque white acrylic lens finish provides maximum optical comfort and effective light distribution. The low profile dimmable unit is ETL damp listed and produces 1050 lumens at 80+ CRI.

Performance

- Suitable for indoor lighting.
- Dimmable with most dimmer; Dimming smoothly from 10% to 100%.
- UL compliant, FCC certified.

Construction

- Opaque white Acrylic Cover
- DOB LED module designed
- Designed For Ceiling Or Wall Applications

Installation

- Flush mounted surface without fixture glare.
- Suitable for damp locations.
- 120V,60Hz input.







Specifications

Geterre	Cailing Firstern		12.6
Category	Ceiling Fixture	Individual Box Length (Inch)	12.6
Shape	Round	Individual Box Width (Inch)	3.54
Bulb Base Type	Integrated LED	Individual Box Height (Inch)	12.6
Bulb Base Finish	N/A	Individual Box Weight Per Unit (Lbs)	2.2
Color Temperature	5000K		
Beam Angle	120°		
Finish	Brushed Nickel		
CRI	>80		
Average Life (Hours)	50000		
Estimated Yearly Energy Cost (11¢/Kwh)	1.81	Lamp Type	LED
Life Based On 3Hrs/Day (Years)	45.66	Bulb Shape	N/A
Product Length (Inch)	N/A	Dry/Wet/Damp	Damp
Product Width (Inch)	Φ12"	Energy Star	NO
Product Height (Inch)	3"	Power Factor	0.9
Product Extension (Inch)	N/A	Current	140MA
Product Weight Per Unit (Lbs)	1.68	Lumen/Watt	70
Dimmable	YES	Warranty (Year)	5
Watts	15	DLC (Yes/No)	No
Watt Equivalent	75	Input Voltage	120V
Lumens	1050	Housing Material	Iron
Certification (ETL/FCC/RoHS)	ETL	Lens	Acrylic
		Led Type	Sanan



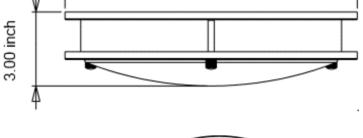

Ø12 inch





by