



JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

## BINA Bina Surface Mount Square

### ORDERING CODE



<b>SERIES</b>	BINA-S	bina surface
<b>TYPE</b>	SQ	square
<b>CCT</b>	27K 30K 35K	2700K 3000K 3500K
<b>SIZE</b>	16 24 32 40	16" x 16" 24" x 24" 32" x 32" 40" x 40"
<b>CURRENT</b>	325 500 675 850 1050	325mA 500mA 675mA 850mA 1050mA
<b>LIGHT OUTPUT</b>	D DI	direct only direct/indirect
<b>HOUSING COLOR</b>	BK WH MC	black white matte chrome
<b>BEZEL COLOR</b>	BK WH MC	black white matte chrome

ORDERING CODE \_\_\_\_\_

Follow the steps to specify your fixture, example:  
**BINA-S-SQ-27K-32-500-D-WH-BK**

SIZE	325MA	500MA	675MA	850MA	1050MA
16"	830lm / 10W	1290lm / 16W	1705lm / 21W	2110lm / 25W	2575lm / 32W
24"	1210lm / 14W	1880lm / 21W	2490lm / 28W	3080lm / 35W	3750lm / 41W
32"	1750lm / 21W	2715lm / 32W	3590lm / 42W	4450lm / 52W	5410lm / 63W
40"	2420lm / 25W	3750lm / 42W	4960lm / 54W	6145lm / 67W	7470lm / 82W

SIZE	325MA	500MA	675MA	850MA	1050MA
16" / 24"	525lm / 6W	790lm / 8W	1050lm / 10W	1300lm / 12W	1575lm / 15W
32" / 40"	860lm / 9W	1330lm / 14W	1800lm / 18W	2270lm / 23W	2900lm / 28W

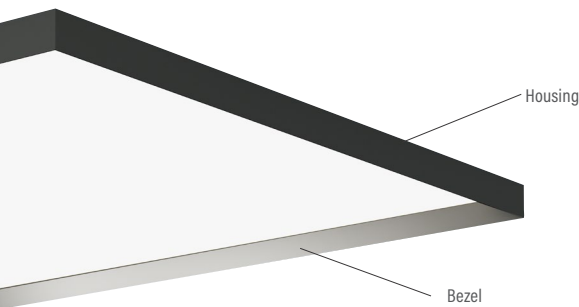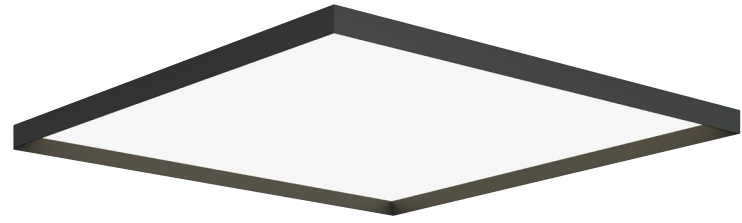

### DESCRIPTION

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

### ELECTRICAL/CONTROLS

- 30, 40, 60, 78 Watt Direct Systems
- 45, 55, 86, 104 Watt Direct/Indirect Systems
- 120-277V driver, 50/60Hz input
- 0-10V Dimming to 1%

### LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

### LED INFO

- LED: Luminus MP Series
- SDCM: 3-step MacAdam Ellipse
- CCT: 2700K, 3000K or 3500K
- CRI: >80
- Lumen Maintenance: L<sub>70</sub> > 50,000 hrs

