

Dimensions: D60" H63" L25

Inside Fixture Dimensions: D43" H52"

Collection: Geneva

Bulb Type:E12 bulb not included

Lamp Frame Weight(1bs):44
Total Weight(1bs):84.6



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer where the purchased was made.



1130G60 D60" H63" L25

SAFETY


Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a
 licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

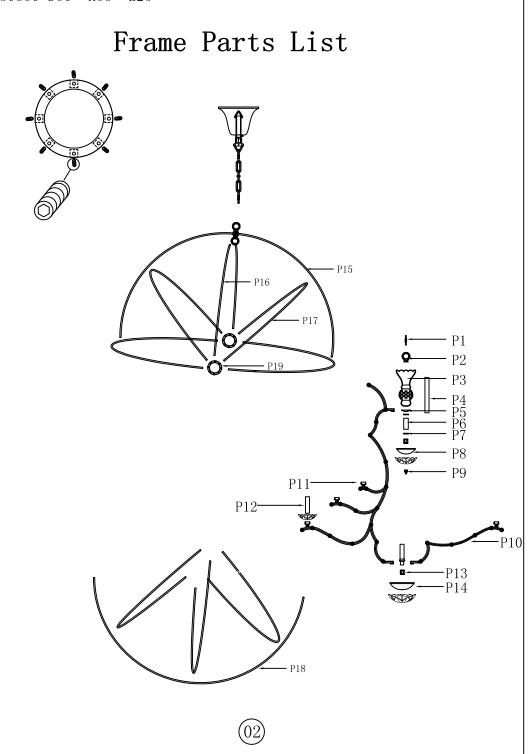

1130G60 D60" H63" L25

Step 1

Please use the parts list to ensure you are not missing any parts

1130G60

PARTS LIST

part	picture	Description	Parts Number	Qty	Check list
ZA		4"Crossbar		1	
ZA		Crossbar	CP1025R70	1	
ZB		7"Canopy		1	
ZC		Canopy ring		1	
ZD		ROD1025	ROD1025	1	
ZE		L59"Chain06T Twist Design	Chain06T	1	
ZF		Power Cord 12' SPT-2-16# Clear/Black		1	
P1		Quick link		1	
P2	D	Loop		3	
Р3		7.9"Glass pillar	MC1008E79CL	1	
P4		Threaded pipe		1	
P5		Cover		1	
P6		Metal tube		1	
		03)	•		


1130G60 D60" H63" L25

part	picture	Description	Parts Number	Qty	Check list
Р7		Cover		2	
P8		4″Metal Cover		1	
Р9	F	Finial		1	
P10		Metal arm 20"	ARM101130200	6	
P11	Lin	Metal arm 38.8"	ARM101130388	6	
P12		3"Metal tube		25	
P13		Hickey		1	
P14		5″Metal Cover		1	
P15		Lamp body(02)		1	
P16		Lamp body(03)		2	
P17		Lamp body (04)		7	
P18		Lamp body(05)		1	

part	picture	Description	Parts Number	Qty	Check list
P19	0	Lamp body(06)		2	
A	-	1050-14#+911-2"		100	
В	-	1050-14#+911-2.5"		24	
С		1050-14#*12+1053-14# +911-2.5"		6	
D		1050-14#*10+1053-14# +911-2.5"		6	
Е		1050-14#*6+1053-14# +911-2.5"		6	
F		1050-14#*14+1053-14# +911-2.5"		6	
G		1050-14#*18+1053-14# +911-2.5"		6	
Н		1050-14#*16+1053-14# +911-2.5"		12	
I		1050-14#*10+1053-14# +911-2.5"		12	
Ј	**	1050-14#+911-3"		24	
K	₩₩€	1050-14#*3+911-3"		24	

part	picture	Description	Parts Number	Qty	Check list
L		1050-14#*3+701-40#		1	
М	**	1050-14#*2+701-40#		1	
0		Glass dish 4.7"	GD1001A47CL	1	
Р		Glass dish 4"	GD1001G40CL	24	
Q		Glass dish 6"	GD1001A60CL	1	

step 2 Canopy Installation Instruction

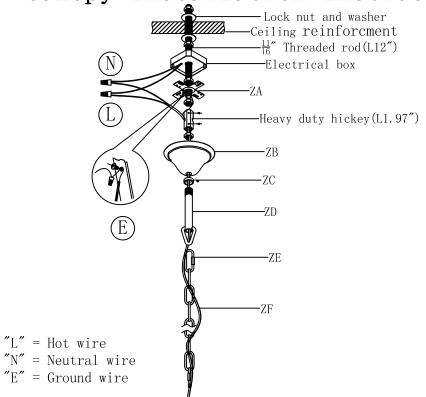


IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1 .Drill a $\phi 0.7''$ hole in the ceiling reinforcment to allow a $^{11}\!\!/_{16}''$ threaded rod to pass through.
- 3 . Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
- 4 .Pull ceiling wires down through the fixture box and make connection.
- 5 . Screw loop only onto threaded pipe.
- 6 . Hang the fixture on chain.
- 7 . Secure the canopy with canopy ring.



Canopy Installation Instruction

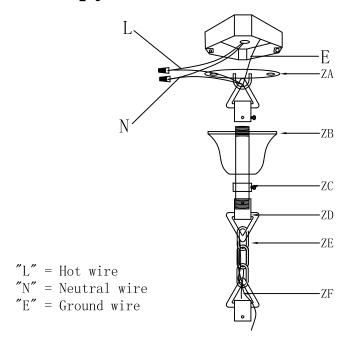

Please read all instructions carefuly. Before you proceed to install, make sure that the power supply is tamed off and off until installation is complete. Please note that each part has been asigned a letter. Please proceed in alphabetical order.

- 1. Fix the crossbar (ZA) to the ceiling with the two crossbar screws.
- 2. Hang the Canopy ring(ZC) back up over the canopy(ZB), through metal rod(ZD) together.
- 3. Hang the electric main and ground wire through the chain(ZE), the Metal rod(ZD), the Loop and the crossbar(ZA) until the end of the electric main reaches the junction box where you can make the appropriate connections.
- 4. Be sure when connecting the wire use electrician approved junction caps.
- 5. Stow the excess wire in the junction box(ZA).
- 6. Raise the canopy(ZB).
- 7. Canopy ring (ZC), attach canopy (ZB) to ceiling, slide metal ring (ZC) over canopy lock (ZD) and hold the canopy (ZB).

Step 3

Frame Assembly Instructions

Installation:


Please read all instructions carefully.

Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number.

Please proceed in a numerical order.

- 1. Hang the chain (01) on the ceiling.
- 2. Unscrew the loop(08), screw the loop(08) into the lamp body(09) and screw the lamp bodys(10) together, hang the lamp body(09) on the end of the chain(01) with quick link(08).
- 3. Break up the lamp bodys (02, 03), unscrew the nut which on the metal arms (04, 05) then screw the metal arms (04, 05) on the lamp body with nuts which unscrew on metal arms (04, 05).
- 4. Hang the lamp body (02) on the end of the lamp body (09) with quick link (08), pull down the main wire through the lamp body (02), connect the wires correctly, install lamp bodys (02, 03).
- 5. Assemble the lamp bodys(11) on lamp bodys(13) one by one, then assemble the lamp body(12) together with screws(14).
- 6. Install the cage which already install outside frame to the lamp body (09).
- 7. Hang the metal tubes (06) and glass dishs (07) on the metal arms (04,05)
- 8. As the crystal dressing instruction, hang the crystal parts.
- PS:When you assemble the outside frame, don't screw tighten, when you already install all outside frame together, you can screw tighten.

The end!

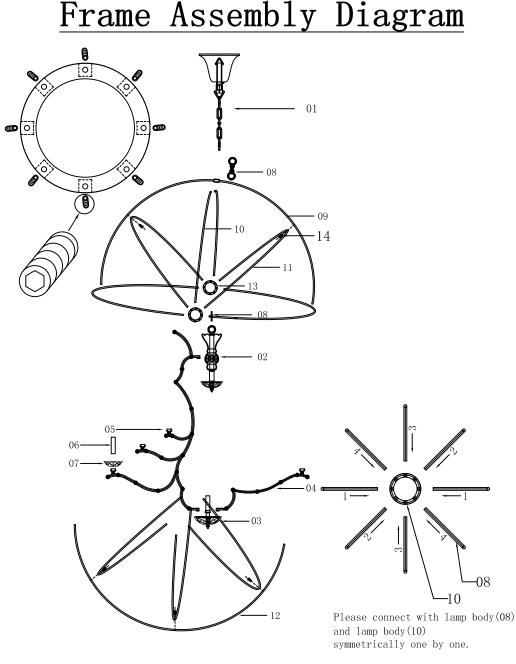

Crystal Dressing Instructions

1. Hang crystal "A"、"B"、"C"、"D"、"E"、"F"、"G"


"H"、"I"、"J"、"K"、"L"、"M"、"N"

"O"、"P"、"Q".

1130G60 D60" H63" L25

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

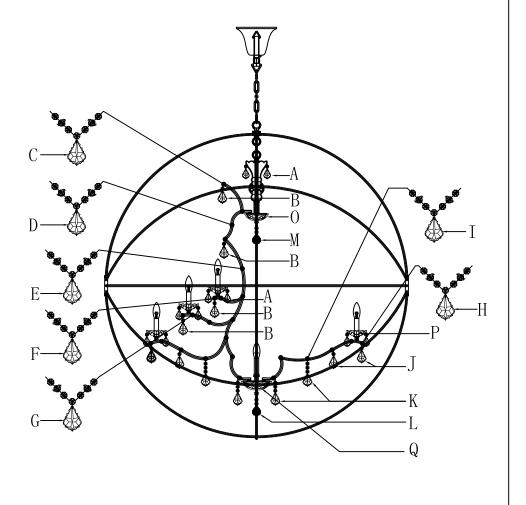

Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture
frames is protected by a durable coating of
lacquer. To clean, use a clean soft, dry cloth. Do
not use any metal polishes, cleaners, abrasives
or any substance which could remove the
protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins
(the metal connectors attaching the crystals),
contact the store where the product was
purchased or contact us. For ease of ordering,
you may use the original crystal trimming
instructions provided with this product and
circle the items you wish to order, indicating
the quantity by writing the number needed
adjacent to the circle. You will be contacted
with prices prior toshipment. All orders must be
pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department. A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department . Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.