

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Flare Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-70913 13"	3000K 90	11W	1099	745	BK Black BN Brushed Nickel

Example: **PD-70913-BK**

### DESCRIPTION

Symmetrical, cylindrical and aerodynamic. Brilliance alone or as a collection.

### FEATURES


- 360 degree illumination
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum with acrylic diffuser



### FINISHES



### LINE DRAWING

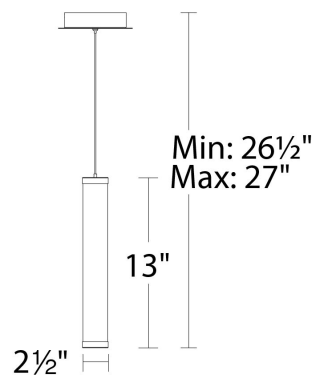

**PD-70913**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Flare

Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-70925 25"	3000K 90	27W	2426	1700	BK Black BN Brushed Nickel

Example: **PD-70925-BK**

### DESCRIPTION

Symmetrical, cylindrical and aerodynamic. Brilliance alone or as a collection.

### FEATURES


- 360 degree illumination
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum with acrylic diffuser



### FINISHES



### LINE DRAWING

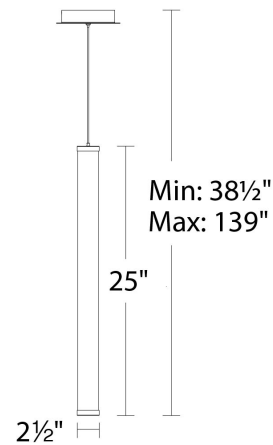

**PD-70925**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Flare

Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-70937 37"	3000K 90	37W	3801	2637	BK Black BN Brushed Nickel

Example: **PD-70937-BK**

### DESCRIPTION

Symmetrical, cylindrical and aerodynamic. Brilliance alone or as a collection.

### FEATURES


- 360 degree illumination
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum with acrylic diffuser



### FINISHES



### LINE DRAWING

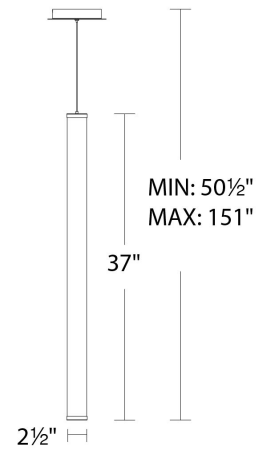

**PD-70937**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Flare Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-70945 45"	3000K 90	42W	4254	2853	BK Black BN Brushed Nickel

Example: **PD-70945-BK**

### DESCRIPTION

Symmetrical, cylindrical and aerodynamic. Brilliance alone or as a collection.

### FEATURES

- 360 degree illumination
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 10%, TRIAC: 100 - 10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum with acrylic diffuser



### FINISHES



### LINE DRAWING

