


# WAND Wall Sconce


## 3-55-xx

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

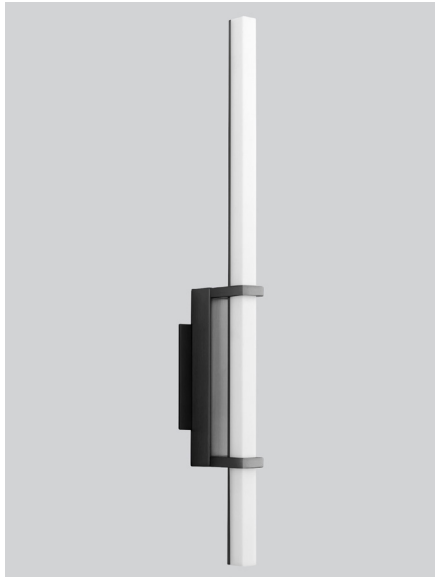

-15 Black

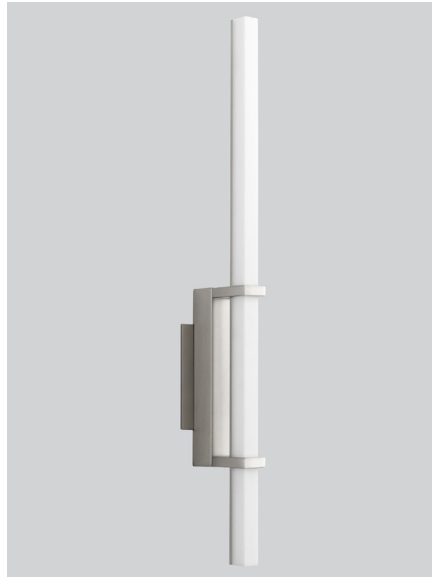


-24 Satin Nickel



-40 Aged Brass

<b>LIGHT SOURCE</b>	1x 24.7W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	28.6W Input Power at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 1977 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V & 277V AC, 50/60Hz
<b>DRIVER OUTPUT*</b>	29.4W max power @700mA
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Black (-15), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	<u>With Small Backplate</u> - 2"x3" J-Box, 4" Square J-Box w/ single device mud ring <u>With Large Backplate</u> - 2"x3" J-Box, 4" Octagonal J-Box
<b>STANDARDS</b>	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

\* 600-1200mA programmable driver, 50.4W max power @1200mA

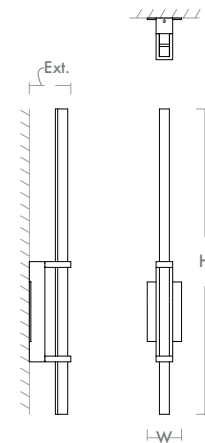

### DIMENSIONS

<b>W:</b>	<b>2.75"</b>
<b>H:</b>	<b>24.38"</b>
<b>Ext:</b>	<b>3.33"</b>
<b>M.C:</b>	<b>16.19" From top of fixture</b>

Order example for standard fixture:  
**3-55-24** (x-xxx: LED Sequence # / -xx: Finish)

