


ICAT4R-T24LED-6PK

(RE4RICAT-LED)

4" LINE VOLTAGE T24 LED ICAT REMODEL HOUSING

120V-IC AIRTIGHT T24 LED HOUSING

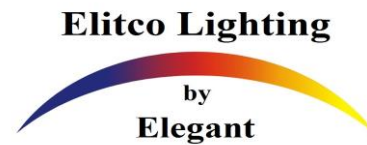

PRODUCT DESCRIPTION

ICAT4R-T24LED housing is designed for IC rated ceilings. Accommodates up to 12W MAX LED lamps.

SPECIFICATIONS:

HOUSING: Low 5 5/8" profile for shallow ceilings. Pre-wired. 037" steel housing adjusts up to 1 3/4" ceiling thickness. Trim is secured with torsion wing spring/ standard coil springs. Designed to be installed in remodel applications. IC rated housing may have direct contact with insulation.

AIR FLOW RESTRICTION: Airtight models are designed to restrict air flow from room into plenums in compliance to the WSEC- Washington State Energy Code (less than 2.0 CFM-Cubic Feet per Minutes)

MOUNTING: Supplied with (4) high tension remodeling clips to secure the housing to an existing sheet rock ceiling. **JUNCTION BOX:** Pre-wired, galvanized steel J-box with (4) knock-outs. Strain clamps and ground wire. Equipped with safety standard thermal protector rated for 90°C.

LABELS: UL/CUL listed (CUL listed number: E356594), ETL/Cetl listed (3194213)

