


Assembly Instructions for 435

We recommend installation of this fixture be done by a licensed electrician. Turn off power at the main fuse or circuit breaker box. DO NOT EXCEED RECOMMENDED WATTAGE!

** Actual parts may vary slightly depending upon the model

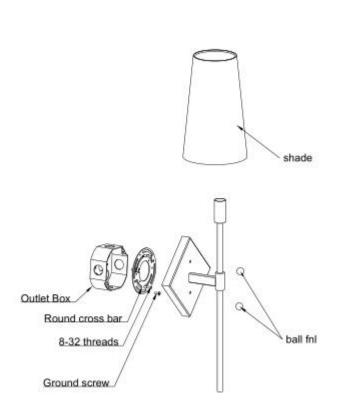

- 1. Remove the parts carefully from the box before discarding the carton.
- 2. Attach round cross bar to the outlet box with ground screw facing out.
- 3. Thread the 8/32 threads into the cross bar; about %" should extend beyond the backplate.
- 4. Fasten ground wire to green screw, Fasten lead wire (or white wire) with ridges to the white wire. Use wire nut to fasten it.
- 5. Fasten smooth (or black wire) lead wire to the black wire in the box & use nut to fasten it.
- 6. Place the fixture over the outlet box going through 8/32 threads.
- 7. Secure the fixture using ball nut.
- 8. Install the shade over the socket
- 9. Install bulbs (not included)
- 10. Restore circuit breaker