



JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

# SABER CCT Select, 120V

### ORDERING CODE

PART NUMBER	138513	
LENGTH	12	12-7/16"
	16	16-7/16"
	24	24-3/8"
	32	32-3/8"
CCT & LM MULTIPLIER	3CCT	3000K (1.00) 3500K (1.01) 4000K (1.03)
	CRI	90 90 CRI
	FINISH	WH
BZ		bronze

ORDERING CODE \_\_\_\_\_

Follow the steps to specify your fixture, example:  
**138513 - 12 - 3CCT - 90 - WH**

LENGTH (INCH)	LUMENS (LM)	POWER (W)
12-7/16"	750	10
16-7/16"	950	13
24-3/8"	1500	20
32-3/8"	2000	26



Direct Connect



Standard three selectable CCT 3000K, 3500K, 4000K



BZ



WH

### DESCRIPTION

The Saber with CCT Select is a low profile, linear, line voltage, LED cove fixture with a white or bronze aluminum extrusion housing. It has highly efficient, color consistent LEDs with an SDCM of 3. A premium opal lens allows for smooth and even illumination eliminating pixilation and striations on the wall or surface below. The Saber is dimmable to 5% with integrated driver and is optimized for fast permanent installation. Plug-in or hardwire with flexible cable connectors offered. Switch boxes offered with Occupancy Sensor option. Selectable CCT options include 3000K, 3500K, 4000K. Saber carries the first 5 Year FIXTURE WARRANTY.

### HOUSING

- Extruded aluminum housing with white or bronze finish.

### MOUNTING

- 0-90° angle adjustable mounting brackets. Two mounting brackets included per fixture. One end to end connector included per fixture.

### ELECTRICAL/CONTROLS

- 120Vac, 50-60Hz input
- Typical 750 lumen/foot or 75 lm/W
- Listing for hardwired and portable application
- Triac dimming (with standard dimmer)
- Linkable up to 300W
- Ambient operating temperature: -10°C to + 40°C


### LISTINGS

- ETLus Listed to UL1598 and UL153 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #250.0
- IP20 rated
- JA8, Title 24 certified (2019 standard)
- Energy Star certified


### LED INFO

- Samsung 2835 LED:
- SDCM: 3-step MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance: L<sub>70</sub> > 50,000 hrs

## PRODUCT DIMENSIONS

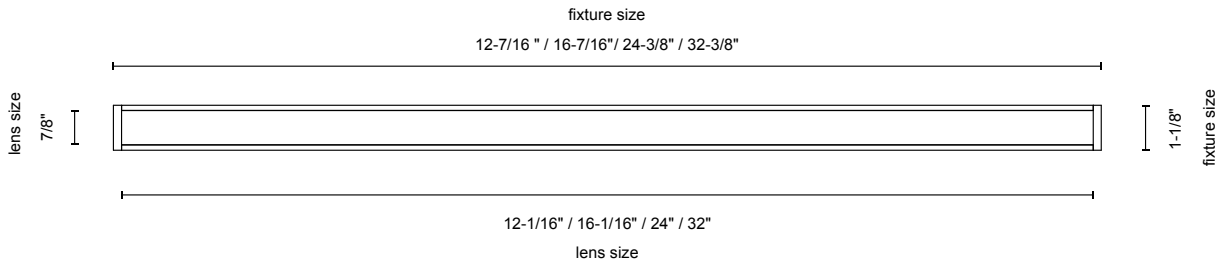

### Dimensions

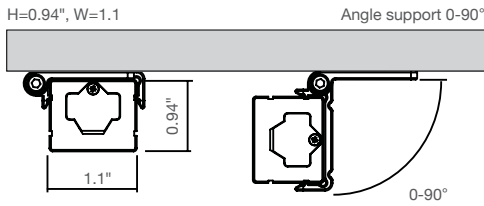

## ACCESSORIES

### Accessories

- 138521BK 6" flexible connector, black
- 138522BK 12" flexible connector, black
- 138523BK 24" flexible connector, black
- 138524BK 72" flexible connector, black

- 138521WH 6" flexible connector, white
- 138522WH 12" flexible connector, white
- 138523WH 24" flexible connector, white
- 138524WH 72" flexible connector, white

- 138526BK 72" power feed, black
- 138526WH 72" power feed, white

- 138527BK 72" plug-in feed, black
- 138527WH 72" plug-in feed, white

- 138529BZ1 switch box with occupancy sensor, bronze
- 138529WH1 switch box with occupancy sensor, white

- 138519WH/120 terminating junction box, non switchable, white

### NOTES

1. 120V rocker switch included.
2. End-to-end connector included with each fixture.



Flexible Connector

**Technical Specs:**  
120Vac



Plug-In Power Feed

**Technical Specs:**  
120Vac



Power Feed

**Technical Specs:**  
120Vac



### Switch Box with Occupancy Sensor

**Technical Specs:**  
120Vac  
Multiple 1/2" knockouts  
Captive mounting screws  
Time Delay: 30 sec minimum  
Dimensions: 8-1/4"L x 1"H x 3-5/8"W  
Occupancy Timeout: 30 sec  
Sensing Distance: 3 ft  
Up to 300W on single box



### Terminating Junction Box

**Technical Specs:**  
120Vac  
Multiple 1/2" knockouts  
Captive mounting screws  
Up to 300W on single box

### Connectors<sup>2</sup>



End-to-end