

# ASSEMBLY AND INSTALLATION INSTRUCTION

Item#: UP-1116,UP-1117,UP-1118,UP-1119

Power Supply Voltage: 120V 60HZ

**Use 10 Wattage LED  
bulb (bulb included)**

**WARNING :** Before starting installation,turn off power by removing fuses or turning off circuit breakers. Turning off the power by using the light switch is not sufficient to prevent electrical shock. If you feel you do not have electrical experiences needed,have the fixture installed by a qualified licensed electrician.

**CAUTION :** This is just an installation "guide ". Pls check with your local certified electrician for proper installation per your city code. We can not be held liable for the use or misuse of the installation guide provided.

## Wiring :

1. Mount strap securely to outlet box with 2 pcs of mounting screws provided.
2. Hold the canopy and attach driver BK wire to Supply BK wire ; driver WH wire to Supply WH wire with wire connectors provided.
3. Attach Ground canopy wire on Green Ground screw on strap make a few rounds and attach it to Supply Ground wire by wire connector provided.
4. Tuck extra wires carefully into box.
5. Fix the canopy to strap by rotating two sets screw until it is tight.
6. Turn on the power.

## Suggested Dimmers

This fixture is designed to operate with most standard dimmer. Noted below is a listed of dimmers that have been tested with this fixture.

This list of dimmers does not imply any guarantee or warranty of compatibility with a particular application.


Dimmers that are not listed do not imply non-compatibility.

Dimmer that works with these pendant is:

DVCL-153P / SCL-153P / AYCL-153P / CTCL-153P /

DVCL-253P / DVSCLL-253P / SELV-300P / GT-150 / GTJ-250M

(ALL ARE LUTRON BRAND)

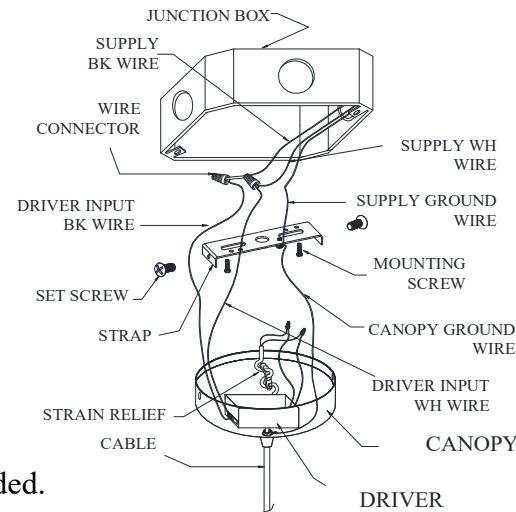

UP-1119

UP-1118

UP-1117

UP-1116



**WARNING : DO NOT CUT THE PENDANTS CABLE.  
LOOP THE CABLE INSIDE THE CANOPY LIKE THE  
PICTURE SHOWS ON THE LEFT TO HAVE YOUR  
DESIRED LENGTH OF CABLE EXPOSING CANOPY.**

**NOTE : Bulb is free of maintenance and requires no re-lamping.**