

## LED CTC COMM

Flush-Mount Mounted • Damp Location Listed PROGRESS LED



### Description:

Close-to-ceiling, surface mount round with clean modern lines and white acrylic diffuser. DC LED light engine with 1184 delivered lumens at 3000K and 90+ CRI.

### Specifications:

- White acrylic Diffuser
- Brushed Nickel finish.
- Steel construction.
- Dimmable to 10% brightness with many Forward and Reverse Phase dimmers.
- 3000k color temperature.
- TM-21 54,000 hour life.
- Meets California Title 24 - JA8 - 2016.
- 1,184 lumens (delivered).
- Dimmable to 10% brightness (See Dimming Notes)
- Ceiling pan covers a standard 4" recessed outlet box: 14 in W., 0.375 in ht., 14 in depth
- Ceiling pan
- 6 in of wire supplied

### Performance:

Number of Modules	1
Input Power	22 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,184/53.8 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	54000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	ETL Damp Location Listed ENERGY STAR® qualified Meets California Title 24 JA8-2016


# P7253-0930K9



### Dimensions:

Diameter: 14 in  
Height: 3-3/4 in

White acrylic Diffuser  
Width: 13 in  
Height: 3-1/2781 in

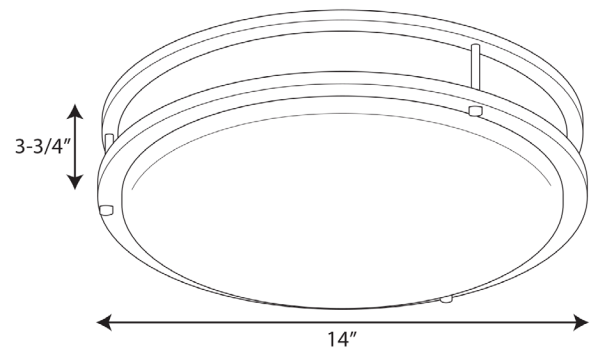


**Photometrics:**

# P7253-0930K9

<b>ELECTRICAL DATA</b>	<b>P7253-0930K9</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.183 A
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

**P7253-0930K9**  
 LED Light Engine: 3000 K 90 CRI  
 System Wattage: 22  
 Fixture delivered lumens: 1184  
 Fixture Efficacy: 53.8  
 Spacing Criteria: 1.0

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXT
0-30	238	20.1
0-40	395	33.4
0-60	724	61.1
0-90	1037	87.6
90-120	103	8.7
90-130	122	10.3
90-150	143	12.1
90-180	147	12.4
0-180	1184	100.0

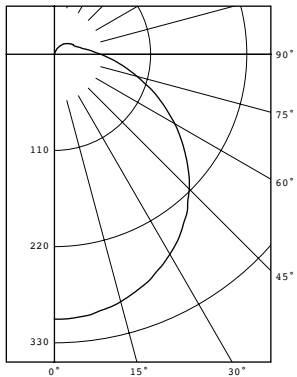

Test 17.00399 Test Date 02/09/17

# P7253-0930K9

## Dimming Notes:

---

P7253-0930K9 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls:

---

Lutron\_Nova T VTELV-300

Lutron\_Diva DVELV-300P

Lutron\_Diva DVCL-253P

Lutron\_Caseta Wireless

Leviton\_6681

Leviton\_SureSlide 6672

Leviton\_SureSlide 6674

Lutron\_Ariadni AYLV-600P

Lutron\_NTLV-600

Lutron\_Maestro MAELV-601

Leviton\_Renoir II AWRMG-EAW

Lutron\_Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.