

## Drums And Clouds

Flush-Mount Mounted • Damp Location Listed PROGRESS LED



### Description:

LED flush mount with white acrylic diffuser mounts to baked enamel ceiling pan. Twist on installation with a single locking thumb screw. UL approved for damp locations. Ceiling or wall mount. 3000 lumens, 93.8 lumens/watt (delivered), 3000K and 90CRI. ENERGY STAR and Title 24.

### Specifications:

- White acrylic Diffuser
- White acrylic diffuser
- Twist on installation.
- Wall or ceiling mount
- White finish
- 3000 lumens, 93.8/lumens per watt (delivered)
- 3000K color temperature, 90+ CRI
- Damp location listed
- Dimmable to 10% with many Forward Phase (Triac) or Electronic Low Voltage (ELV) dimmers
- Energy Star Qualified
- Meets California T24 JA8-2016.
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" recessed outlet box: 16.125 in W., 0.8125 in ht., 16.125 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

### Performance:

|                        |                                    |
|------------------------|------------------------------------|
| Number of Modules      | 1                                  |
| Input Power            | 32 W                               |
| Input Voltage          | 120 V                              |
| Input Frequency        | 60 Hz                              |
| Lumens/LPW (Delivered) | 3,000/93.8 (LM-79)                 |
| CCT                    | 3000 K                             |
| CRI                    | 90 CRI                             |
| Life (hours)           | 36000 (L70/TM-21)                  |
| EMI/RFI                | FCC Title 47, Part 15, Class B     |
| Max. Operating Temp    | 30°C                               |
| Warranty               | 5-year Limited Warranty            |
| Labels                 | ETL Damp Location Listed           |
|                        | ENERGY STAR® qualified             |
|                        | Meets California Title 24 JA8-2016 |


# P730003-030-30



### Dimensions:

Diameter: 16-15/16 in  
Height: 4-1/8 in

White acrylic Diffuser  
Width: 16-15/16 in  
Height: 3-13/16 in

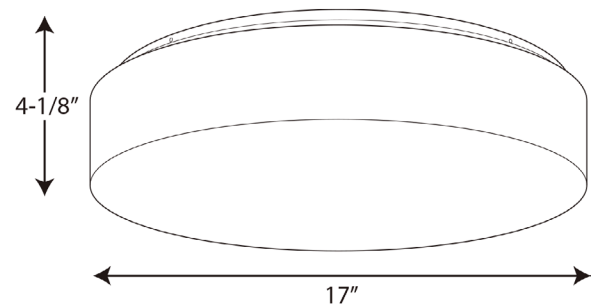

### Dimming Notes:

---

P730003-030-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls:

---

Lutron\_Nova T VTELV-300

Lutron\_Diva DVELV-300P

Lutron\_Diva DVCL-253P

Lutron\_Caseta Wireless

Lutron\_Toggler TGCL-153PH

Lutron\_Ariadni AYCL-153P

Lutron\_NTLV-600P

Lutron\_NAELV-601

Lutron\_Nova N-600

Leviton\_SureSlide 6674

Leviton\_AWSMT-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

# P730003-030-30