

# MONORAIL

## MonoRail Surface Transformer-600W Mag

### DESCRIPTION

This dual-feed surface transformer converts standard 120 line-voltage to 12 volts to provide the necessary voltage for powering a MonoRail low-voltage lighting system. It can power lamps totaling up to 600 watts. The transformer is concealed inside a decorative housing with a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the breaker can be reset.

### INSTALLATION


This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included). Rail is installed through the power feed on the canopy to bring power to the run. Isolating connectors (included) isolate the two power feeds from each other.

### OTHER

Black and white finish have satin nickel feeds. The shortest rigid standoff that can be used with this surface transformer is the 5" rigid standoff (sold separately). If dropping the rail more than 5" below the ceiling, order the desired rigid standoff length and two compatible power extenders (sold separately). This surface transformer may be plugged in with the addition of a Plug Option, a 16' cord with plug (sold separately). 12 volt transformers require the use of 12 volt lamps.

### WEIGHT

20.4lb / 9.25kg ±

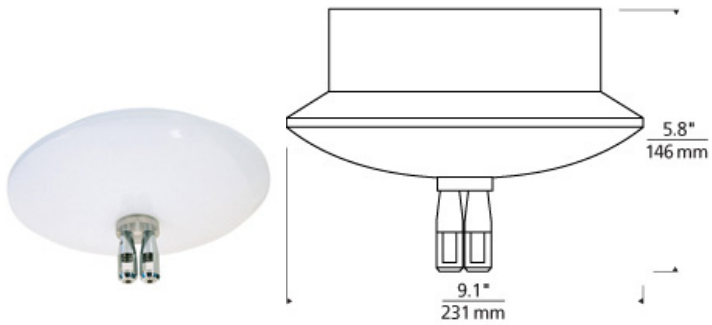

### ORDERING INFORMATION

#### 700MOSRT60D FINISH

- Z ANTIQUE BRONZE
- B BLACK
- C CHROME
- S SATIN NICKEL
- W WHITE



**TECH LIGHTING®**

7400 Linder Avenue  
Skokie, Illinois 60077

T 847.410.4400  
F 847.410.4500

Tech Lighting, L.L.C.

700MOSRT60D \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2014 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.