


BY KALCO LIGHTING™

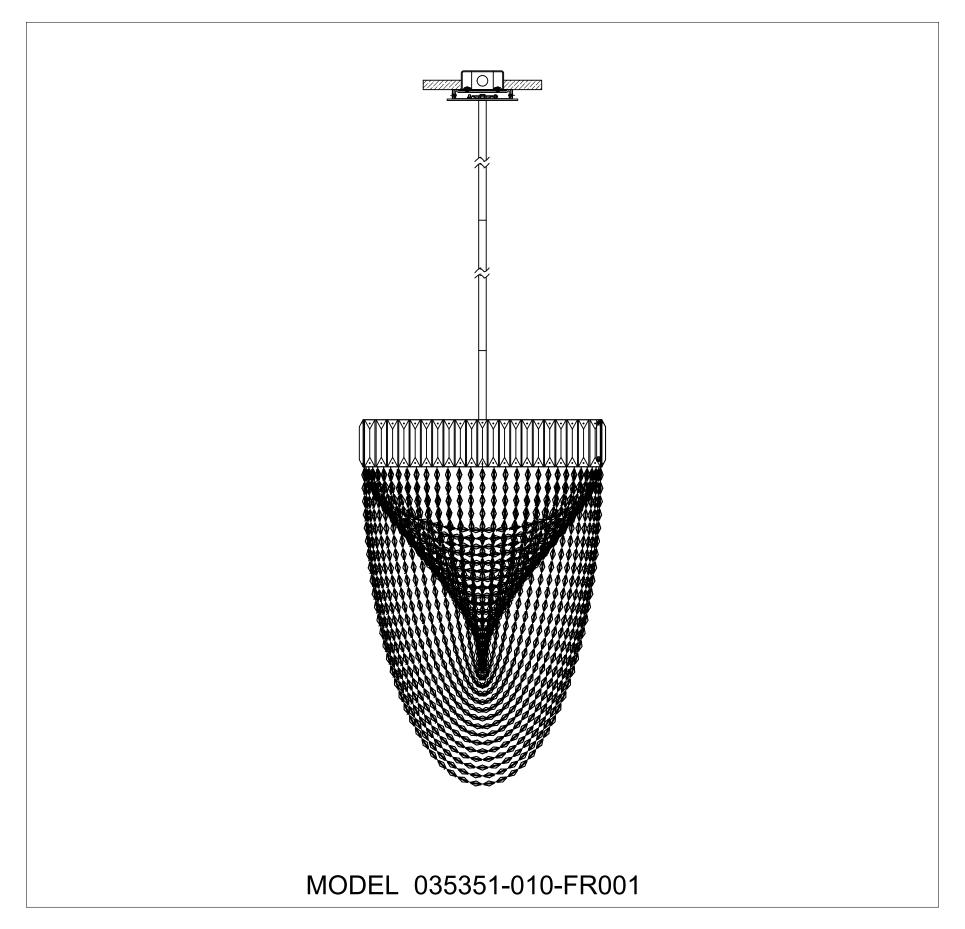

## ASSEMBLY AND DRESSING INSTRUCTIONS

Blending innovative design, cutting-edge technology and the grace and elegance of traditional crystal, ALLEGRI® proudly brings you a new approach to lighting. ALLEGRI® fixtures are made from the finest raw materials and are brought to life through a combination of traditional manufacturing, such as sand casting, hand-forging and technology driven techniques including laser cutting.

Enclosed are detailed instructions on how to properly install your fixture. Please read all instructions carefully. If you need further assistance, please contact the dealer from which you purchased this product or call 800-525-2655 to speak with an ALLEGRI® customer service representative. We hope you enjoy your fixture!



### **ASSEMBLY AND DRESSING INSTRUCTIONS**

# WARNING! CONTENTS ARE FRAGILE HANDLE WITH CARE

THE METAL FRAME, FINISH AND CRYSTAL COMPONENTS OF THIS CHANDELIER ARE VERY DELICATE.

PLEASE EXERCISE EXTREME CAUTION DURING UNPACKING AND INSTALLATION.

PLACE ALL PIECES TOGETHER IN A NUMERICAL ORDER AND IN THE ORIENTATION DEPICTED.
REFER TO THE PARTS LIST TO AVOID ANY CONFUSION BETWEEN PARTS THE PARTS NUMBER MUST COINCIDE.

**CAUTION:** FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY AND PROPERTY DAMAGE. All electrical components must be installed only by a Licensed Electrician.

This product must be installed in accordance with the National Electric Code (NEC), and appropriate local electrical code(s), by a person familiar with the construction and operation of the product and the hazard involved.\*

CAUTION: Do not exceed maximum wattage note on fixture. Uses only recommended bulbs with fixture.

#### **GENERAL NOTES**

- \* For your safety and proper operation of fixture, read and understand all instructions completely before commencing installation.
- \* This fixture is suited for dry locations. Never install fixture on damp ceiling; room should be dry and well ventilated.
- \* Extreme care should be taken to avoid damage to the surface of lighting fixture and wires. Wearing gloves is recommended for installation.
- Connect ribbed wire of lighting fixture to live wire, while smooth wire of lighting to neutral. Connect bare copper or silver color ground wire of fixture to the double colored or green wire of outlet box.
- Use UL LISTED wire nuts for the wiring connections in this fixture. Wrap wire nut connections with UL LISTED electrical tape.
- Keep lighting away from acid, alkali and other corrosive chemical or gas; clean the fixture with a clean cloth only.
- Fixture must be firmly secured when installing ceiling tube, chain pipe and other connecting parts.
- Never cover the lighting fixture when power is connected.
- Disconnect the power before installing, cleaning and/or replacing light bulb.
- \* Extreme care should be taken when installing and cleaning of Glass and/or Crystal Components.
- ❖ This product is rated 110-130V/60HZ bulb 40W Maximum.
- Save these instructions for future reference.

### WARNING

The electricity must be turned off at the main fuse box or circuit breaker before installing this fixture. Turning the power off using the light switch may not be sufficient to prevent electrical shock.

\*ALLEGRI will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.



# ALLEGRI.


BY KALCO LIGHTING™

### **CANOPY MOUNTING INSTRUCTION**



All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.



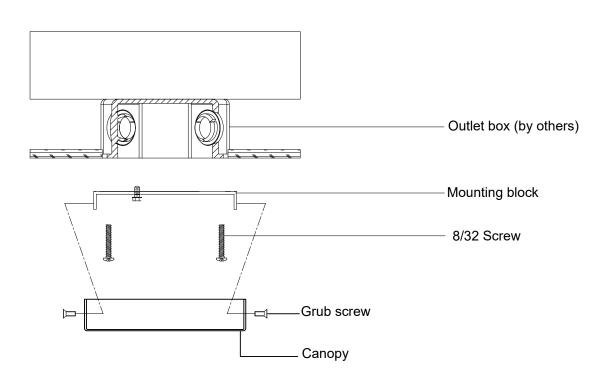

### **INSTALL CANOPY AS FOLLOWS**


CAUTION: Be sure power is off at the main breaker box prior to installation.

- 1. Install cross bar to outlet box with two 8/32 original screws.
- 2. Raise assembled frame with stems and canopy close enough and make electrical connections
- 3. Secure canopy with flat head screws



### FRAME ASSEMBLY INSTRUCTIONS

# MODEL 035351

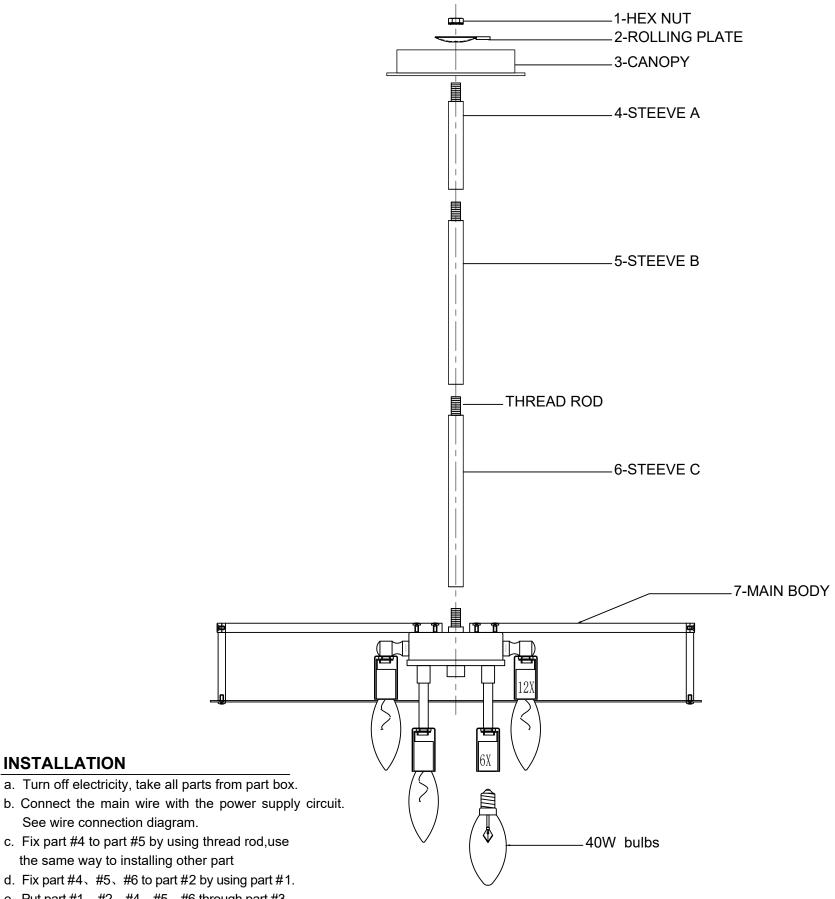

- b. Connect the main wire with the power supply circuit. See wire connection diagram.
- c. Fix part #4 to part #5 by using thread rod,use the same way to installing other part

**INSTALLATION** 

- d. Fix part #4、#5、#6 to part #2 by using part #1.
- e. Put part #1  $\mathtt{, #2}$  , #4  $\mathtt{, #5}$  , #6 through part #3 then screw to part #7.
- f. Check the installation and attach bulb into lamp holder.



# ALLEGRI.


BY KALCO LIGHTING™


### **CRYSTAL DRESSING INSTRUCTION**


# MODEL 035351-010-FR001

### **ATTENTION**

- Take all crystal or glass parts carefully from carton, then put them on a clean
- 2. Start hanging crystals from bottom center to top of fixture in an alphabetical order as shown in diagram

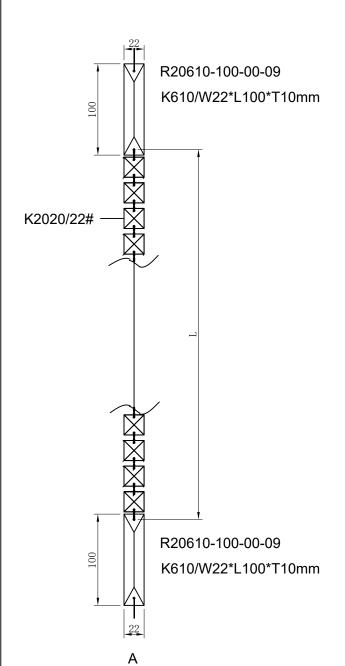

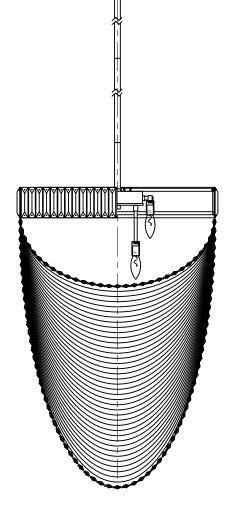










Electrical Danger Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.





You will need 18 - Cand.Buld 40 Watts Recommended 40 Watts Max Bulb not included

Code	L	K2020/22# Qty
A1	861	31PCS
A2	885	32PCS
A3	910	33PCS
A4	935	34PCS
A5	960	35PCS
A6	988	36PCS
A7	1014	37PCS
A8	1041	38PCS
A9	1068	39PCS
A10	1096	40PCS
A11	1124	41PCS
A12	1152	42PCS
A13	1180	43PCS
A14	1208	44PCS
A15	1237	45PCS
A16	1266	46PCS
A17	1295	47PCS
A18	1325	48PCS
A19	1354	49PCS
A20	1384	50PCS
A21	1413	51PCS
A22	1443	52PCS
A23	1473	53PCS
A24	1503	55PCS
A25	1534	56PCS
A26	1564	57PCS
A27	1595	58PCS
A28	1625	59PCS
A29	1655	60PCS
A30	1686	61PCS
A31	1717	62PCS
A32	1748	63PCS
A33	1779	64PCS
A34	1810	65PCS
A35	1841	66PCS
A36	1873	67PCS
A37	1904	68PCS
A38	1935	69PCS
A39	1967	70PCS
A40	1998	71PCS



#### LIGHTING CARE INFORMATION

Every ALLEGRI® fixture is of heirloom quality and will last for generations. To ensure it retains its brilliance and splendor for years to come, proper care and regular cleaning are necessary.

It is recommended that ALLEGRI® fixture, and particularly their crystal trim, be lightly dusted with a feather or lambs wool duster, or soft brush every two months, or whenever it appears dull or dusty. A thorough cleaning should be completed every six months.

Before cleaning an ALLEGRI® fixture, first locate the fixture's trim diagram. This will assist in replacing the crystal trim in its proper location after cleaning. Should a replacement trim diagram be required, please call 866-820-2665 to speak with an ALLEGRI® customer service representative, who can provide a new diagram.

ALLEGRI® recommends several different cleaning methods, depending on the type of fixture. Some fixtures can be cleaned with limited removal of crystal, while others must be completely untrimmed.

Place a soft towel or blanket directly beneath the fixture to limit the damage to both the crystal and the surface below the fixture, should a piece of crystal be dislodged during the cleaning process. Extreme care must be taken around any electrical fixture. For personal safety and the safety of the fixture, be sure that the fixture has been turned off. Never rotate or spin the fixture as this can cause the fixture to lose support and fall. Instead, move around the fixture while cleaning.

#### White Glove Method

Prepare a cleaning solution of one part isopropyl alcohol to three parts distilled water and place in a clean spray bottle. Do not use packaged cleaning fluids, as many of these contain ammonia, which may degrade the finish of the fixture and the quality of the crystal.

Wearing white cotton gloves, spray one glove with the solution and keep one dry. Gently polish each crystal with the damp glove and immediately wipe it with the dry glove. Do not tug or pull on the crystal, as this may cause the connectors to chip or crack the crystal, or dislodge it from the fixture.

Warning: To reduce the risk of personal injury due to fire and/or electric shock, never spray solution at or near the fixture.

#### Crystal Removal Method

Gently remove trim and hand-wash the crystal in lukewarm water using a mild detergent. Rinse in clean water and dry with a soft clean cloth. Do not soak finished crystal such as SWAROVSKI ELEMENTS Colors: Teak, Golden Shadow or Silver Shade, for extended periods, as this may degrade the crystal's finish.

With the fixture untrimmed and turned off, wipe the frame, including the light bulbs once they are completely cool, with a soft cloth.

Wearing white gloves, finger-cots or using a soft clean cloth, gently replace the trim as directed in the trim diagram.