

# Helios Wall

AW1101 | 1.0

## GENERATION LIGHTING Wall


### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

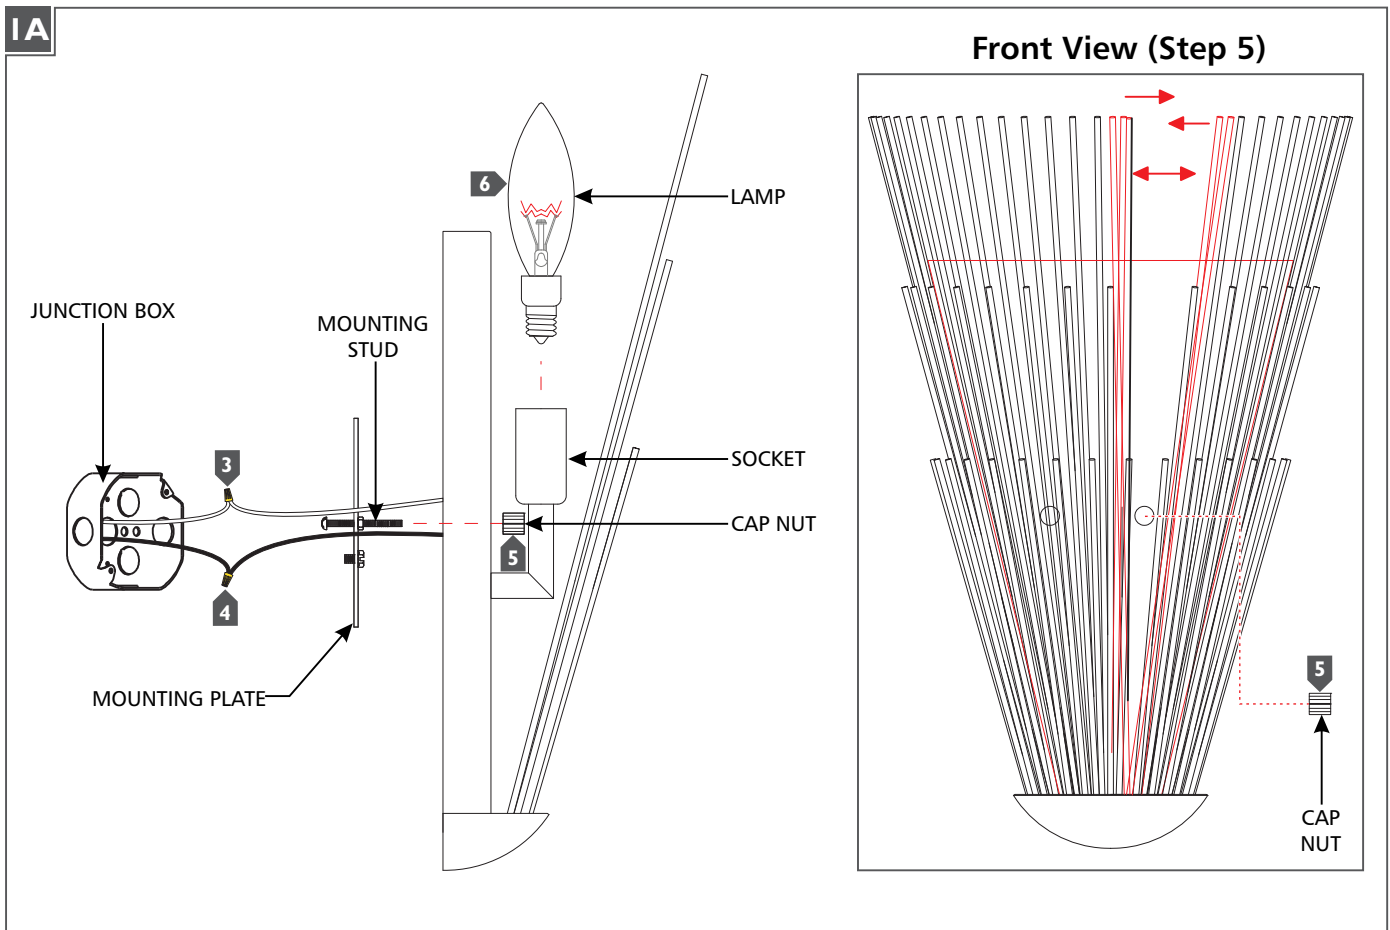

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Properly place all wires and wire nut connections into the junction box/fixture base:
  - A)** Mount the fixture base onto the mounting studs.
  - B)** Using two fingers, carefully spread aside two or three rods creating just enough space to fasten one cap nut at a time. Repeat for remaining cap nut.
  - C)** If necessary, adjust the rods back to their position by slightly bending them back as shown by arrows.
- 6** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.