
ASSEMBLY INSTRUCTIONS

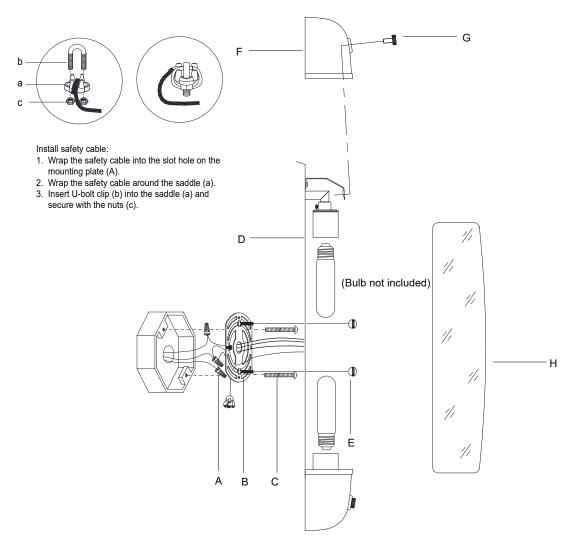

Selecta Long Sconce

Item# TOB 2062

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- Carefully remove all parts from the box.
- Remove the mounting plate (B) from the fixture body (D) by unscrewing the cap nuts (E).
- Install the mounting plate (B) to junction box and secure with the mounting screws (C).
- Connect the safety cable as shown in figure.
- Wrap the fixture ground wire to the green ground screw on the mounting plate (B) and secure, then connect to ground wire in the junction box using wire nut (A). IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- Connect the fixture white wire to the neutral wire in the junction box using the wire nut (A).
- Connect the fixture black wire to the hot wire in the junction box using the wire nut (A). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
- Install the fixture body (D) to the junction box and secure with the cap nuts (E).
- Insert bulbs (not included) into sockets.
- 10. Remove the shade cap (F) by unscrewing the thumbscrew (G) then attach the shade (H) to the fixture body (D) and secure with the shade cap (F) using the thumbscrew (G).
- 11. Installation is complete, turn on power at fuse or circuit breaker.







^{***}Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.