

# LIVING DISTRICT

Collection: Hang

Installation manual for:

LD6103D37 D37"H13.5" L6


## Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P2) in side of top unit the mounting bracket.
6. Put the lamp arm(P18) to the corresponding position.
7. Screw the middle rod (P11) to the lamp body then connect to the chain(P8) and connect the canopy lock(P7).
8. Put the canopy(P3) on the nipple(P4) and connect the canopy lock(P7), then use the canopy ring(P6) to screw tighten.
9. Install E12 light source, no include bulb.
10. Install the shade (P22) to the bulb.

The end!

## PARTS LIST

part	picture	Description	Qty	Check list
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		D5.1" Canopy plat	1	
P4		Nipple	1	
P5		Power Cord 8', 18AWG, SPT-1 Gold/Black	1	
P6		Canopy ring	1	
P7		Canopy lock	1	
P8		L5' CHAIN04P Plain Design	1	
P9		D2.5" Loop	1	
P10		Check ring	2	
P11		D0.75"*L9.85" Tube	1	
P12		Nipple	1	
P13		Hex nut	14	
P14		Hickey	1	
P15		D4.75" Around metal plate	1	
P16		D4.85" Receiver bowl	1	
P17		Cap nut	1	
P18		L15.15" Arm	6	
P19		D3" Lamp holder	6	
P20		D0.87"*L2.15" Candle cover	6	
P21		E12 Socket	6	
P22		D4.5"*H4.5" Lamp shade	6	

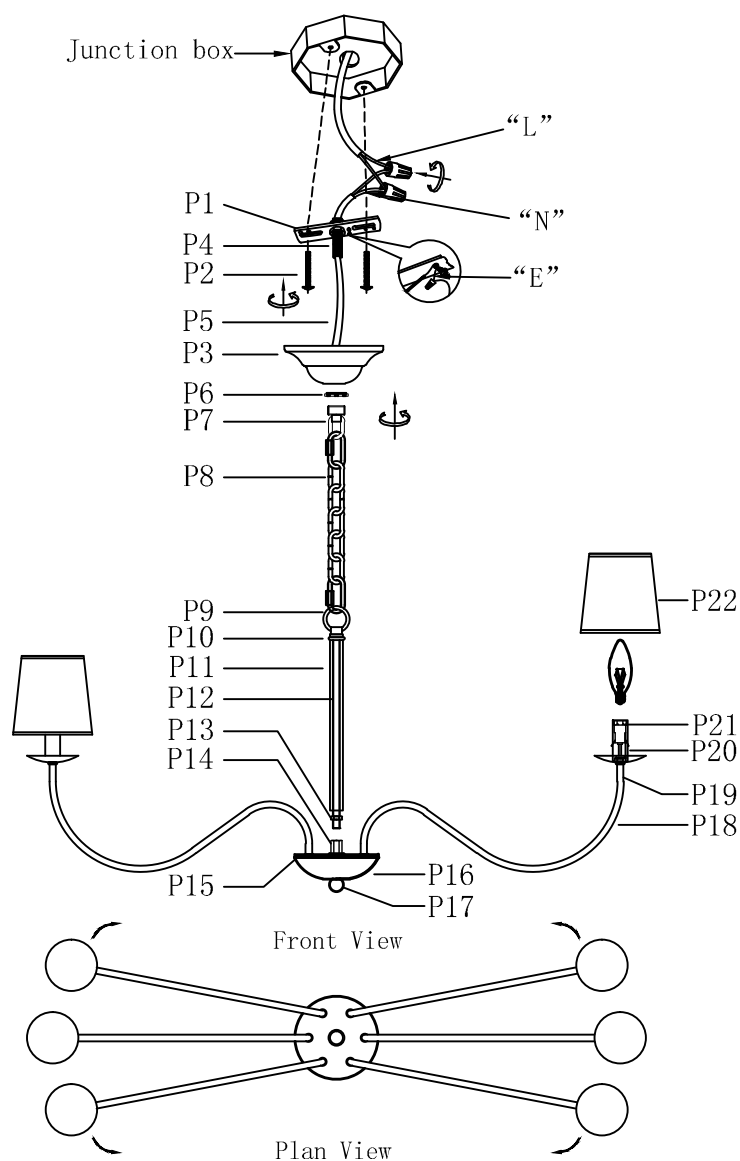

"L" = Hot wire  
 "N" = Neutral wire  
 "E" = Ground wire